

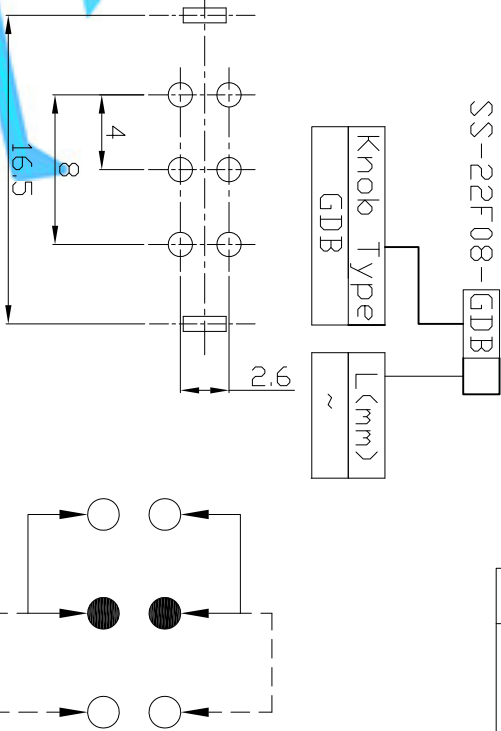
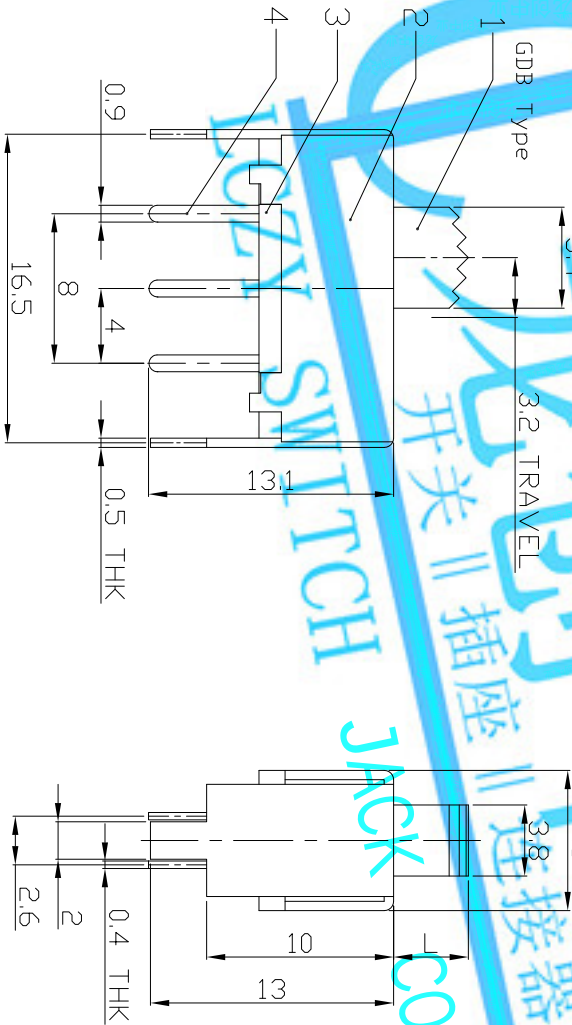


DIMENSIONS

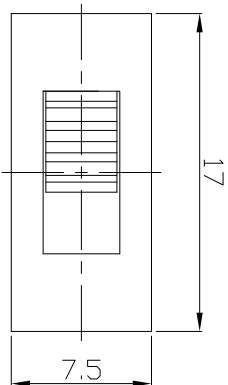

MODEL CODE

SS-22F08-GDB



P.C.B. LAYOUT
BOTTOM VIEW

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	200±80gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	MAT'L	SEE NOTE	TITLE:		PART NO.:	
6	SPRING	STEEL WIRE	2	NATURAL			SEE NOTE	SLIDE SWITCH / VERTICAL		SS-22F08	
5	CONTACT	BRASS STRIP	2	AG PLATED			FINISH	SEE NOTE		DWG NO.:	
4	TERMINAL	BRASS STRIP	6	AG PLATED			SEE NOTE	DR: Ricky 2015/05/27		ADL-22F08	
3	BASE	PHENOLIC RESIN	1	BLACK			SEE NOTE	CHKD: Ricky 2015/05/27		SCALE SHEET REV.:	
2	FRAME	STEEL STRIP	1	NI PLATED			Q'TY	APPD:		CUSTOMER DRAWING	
1	KNDB	POM	1	BLACK			Q'TY	APPD:		CUSTOMER DRAWING	
ND.	PARTS	MATERIAL	Q'TY	FINISHING			Q'TY	APPD:		CUSTOMER DRAWING	