


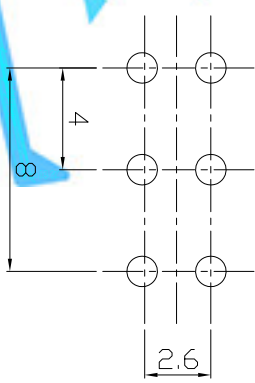

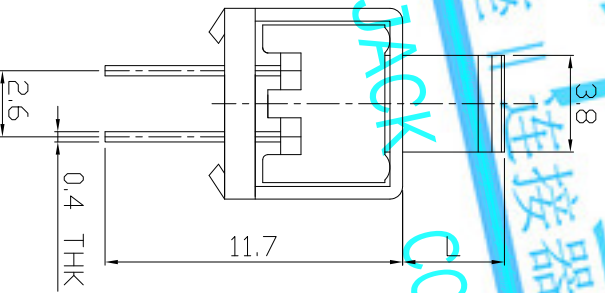
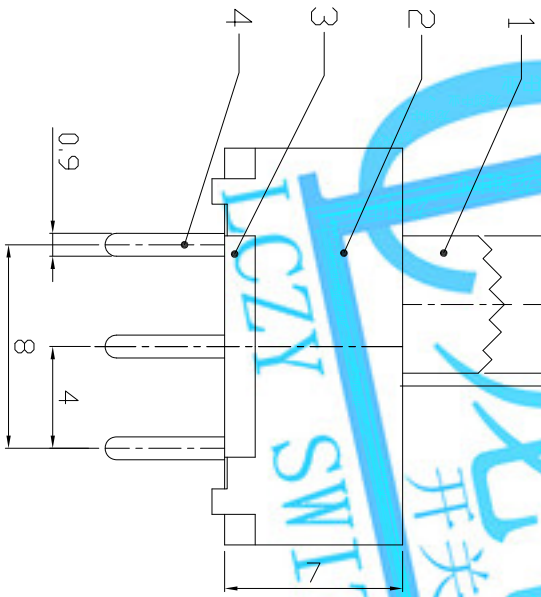

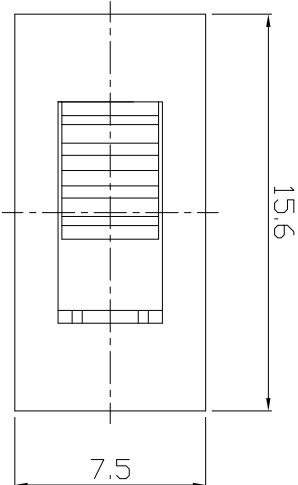


DIMENSIONS



MODEL CODE

SS-22F15-GDB



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

LONGCHUANG ZHONGYE (HK)CO.,LIMITED									
TITLE:			PART NO:		SS-22F15				
SLIDE SWITCH / VERTICAL									
DR: Rocky 2015/09/02					DWG NO: ADL-22F15				
CHKD: Rocky 2015/09/02									
APPD: 5/2					SCALE SHEET 1/1		REV. A CUSTOMER DRAWING		
					UNITS mm				
					WITHIN 1.5mm: ±0.1mm OVER 1.5mm: ±0.2mm				
8									
7									
6			SPRING		STEEL WIRE		2		NATURAL
5			CONTACT		BRASS		2		AG PLATED
4			TERMINAL		BRASS STRIP		6		AG PLATED
3			BASE		PHEUDLIC RESIN		1		NATURAL
2			FRAME		STEEL STRIP		1		BLACK
1			KNOB		PDM		1		BLACK
NO.			PARTS		MATERIAL		Q'TY		FINISHING