

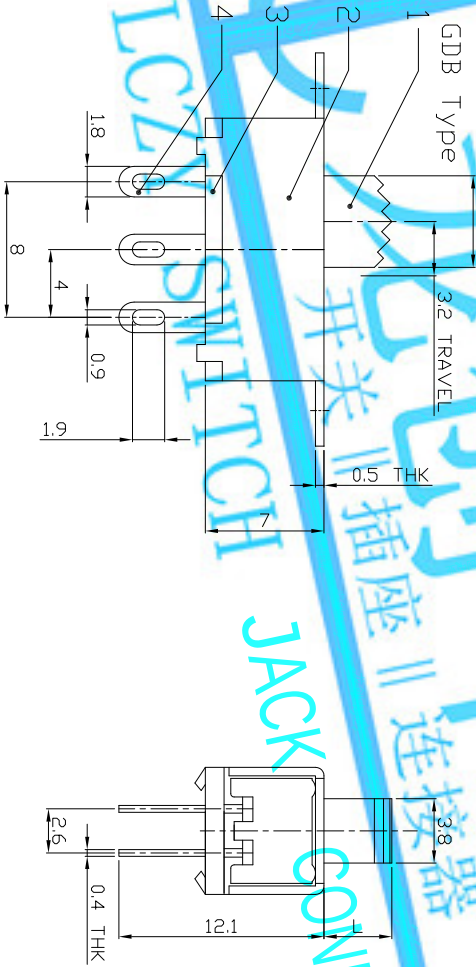
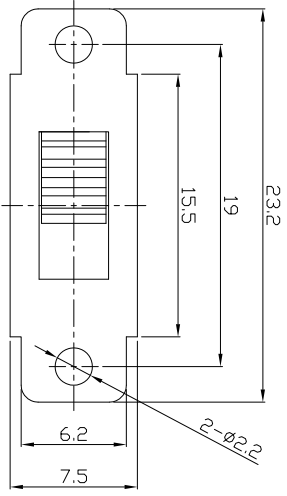



DIMENSIONS



MODEL CODE

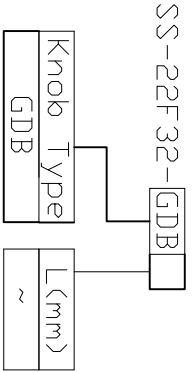

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	0.5A 50V AC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±80gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING	STEEL WIRE	2	NATURAL	SEE NOTE					
5	CONTACT	BRASS STRIP	2	Ag PLATED						
4	TERMINAL	BRASS STRIP	6	Ag PLATED	FINISH		TITLE: SLIDE SWITCH / VERTICAL			
3	BASE	PHENOLIC RESIN	1	NATURAL	SEE NOTE					
2	FRAME	STEEL STRIP	1	BLACK	DR: Jockey	2015/09/02				
1	KNDB	PDM	1	BLACK	CHKD: Jockey	2015/09/02				
ND.	PARTS	MATERIAL	Q'TY	FINISHING	APPD:		DWG NO: ADL-22F32	SCALE	SHEET	REV.
							2/1	1/1	A	CUSTOMER DRAWING