

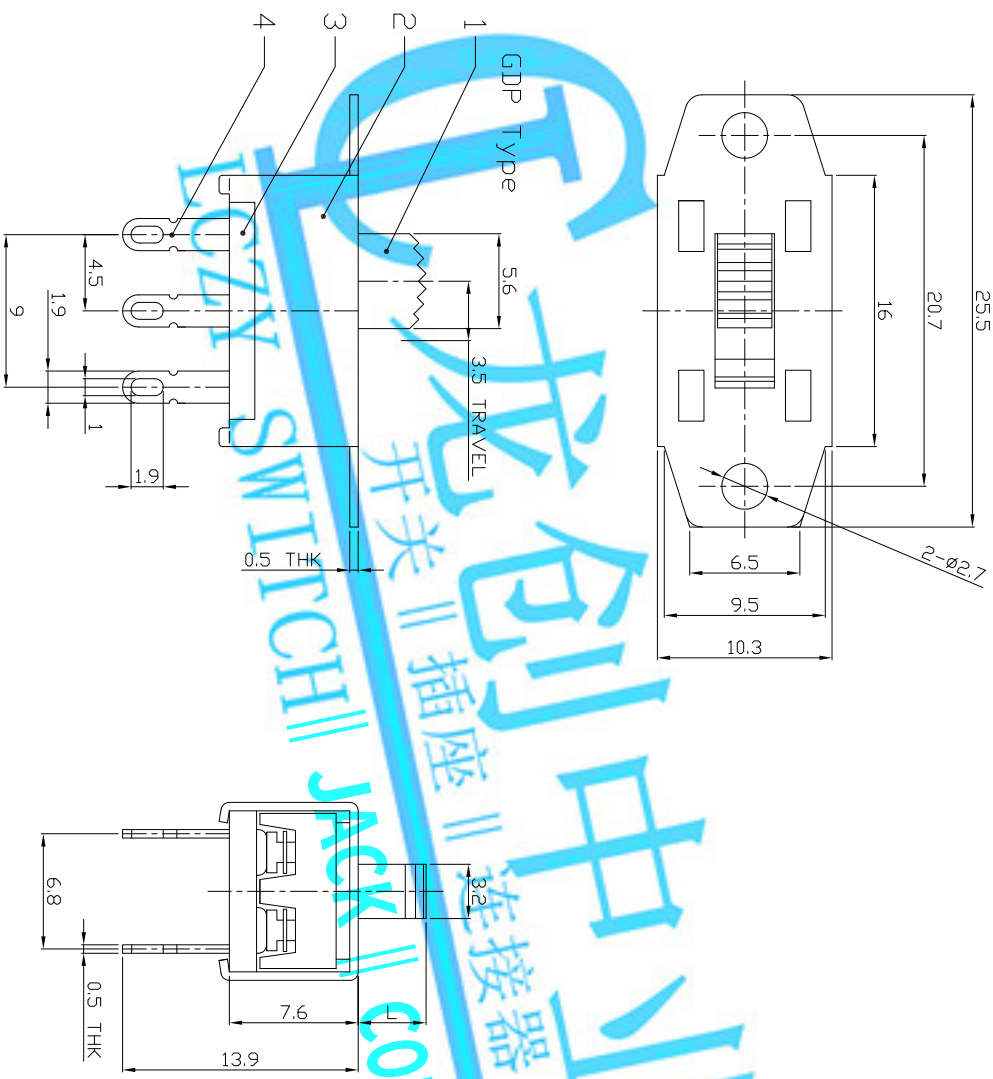


DIMENSIONS

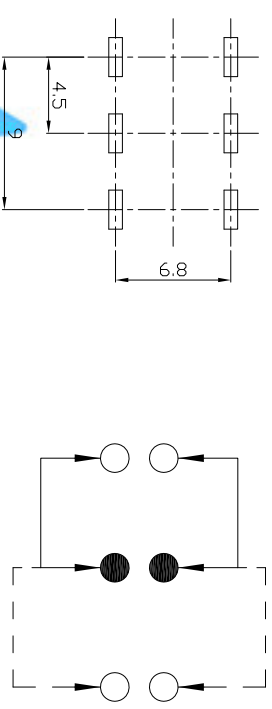

MODEL CODE

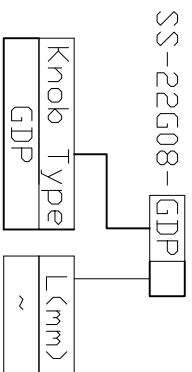

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	1A 125V AC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7					OVER 1.5mm: ±0.2mm	mm				
6	SPRING PLATE	PBS STRIP	2	NATURAL		MAT'L				
5	CONTACT	COPPER STRIP	2	AG PLATED						
4	TERMINAL	BRASS STRIP	6	AG PLATED		FINISH				
3	BASE	PHENOLIC RESIN	1	BLACK		SEE NOTE	TITLE:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-22G08
2	FRAME	STEEL STRIP	1	NI PLATED		DR: <i>Rocky</i> 2015/09/02	DWG NO.:	ADL-22G08		
1	KNDB	PDM	1	BLACK		CHKD: <i>Rocky</i> 2015/09/02	SCALE	SHEET	REV.	
NO.	PARTS	MATERIAL	Q'TY	FINISHING		APPD:	21	1/1	A	CUSTOMER DRAWING