


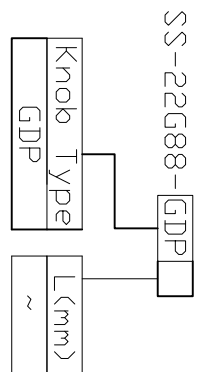
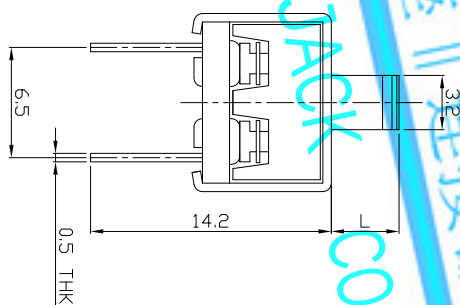
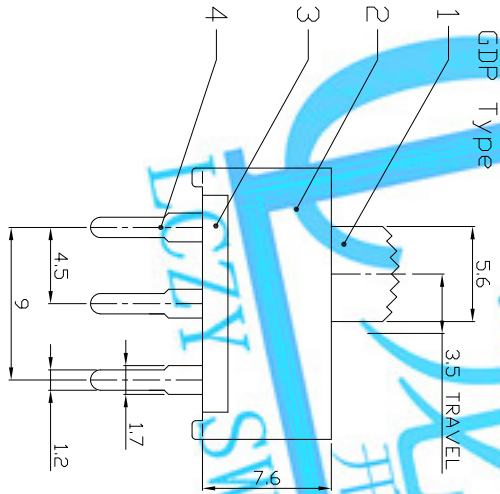


DIMENSIONS



ELECTRO-MECHANICAL CHARACTERISTICS
Refer to additional specifications

RATING	1A 125V AC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	3.5mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8				WITHIN 1.5mm: ±0.1mm	UNITS	LONGCHUANG ZHONGYE (HK)CO.,LIMITED			
7				OVER 1.5mm: ±0.2mm	mm				
6	SPRING PLATE	PBS STRIP	2	NATURAL	MAT'L	SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		
5	CONTACT	COPPER STRIP	2	Ag PLATED	FINISH	SEE NOTE	PART NO.: SS-22G88		
4	TERMINAL	BRASS STRIP	6	Ag PLATED					
3	BASE	PHENOLIC RESIN	1	BLACK		SEE NOTE			
2	FRAME	STEEL STRIP	1	NI PLATED	DR: Ricky 2015/09/02	DWG NO: ADL-22G88			
1	KNDB	POM	1	BLACK	CHKD: Ricky 2015/09/02	SCALE 1/1	REV. A	CUSTOMER DRAWING	
ND.	PARTS	MATERIAL	Q'TY	FINISHING	APPD:				