

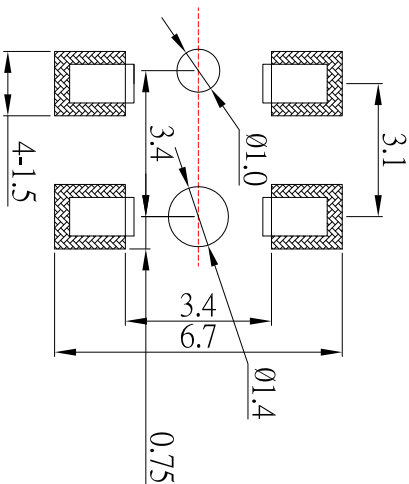


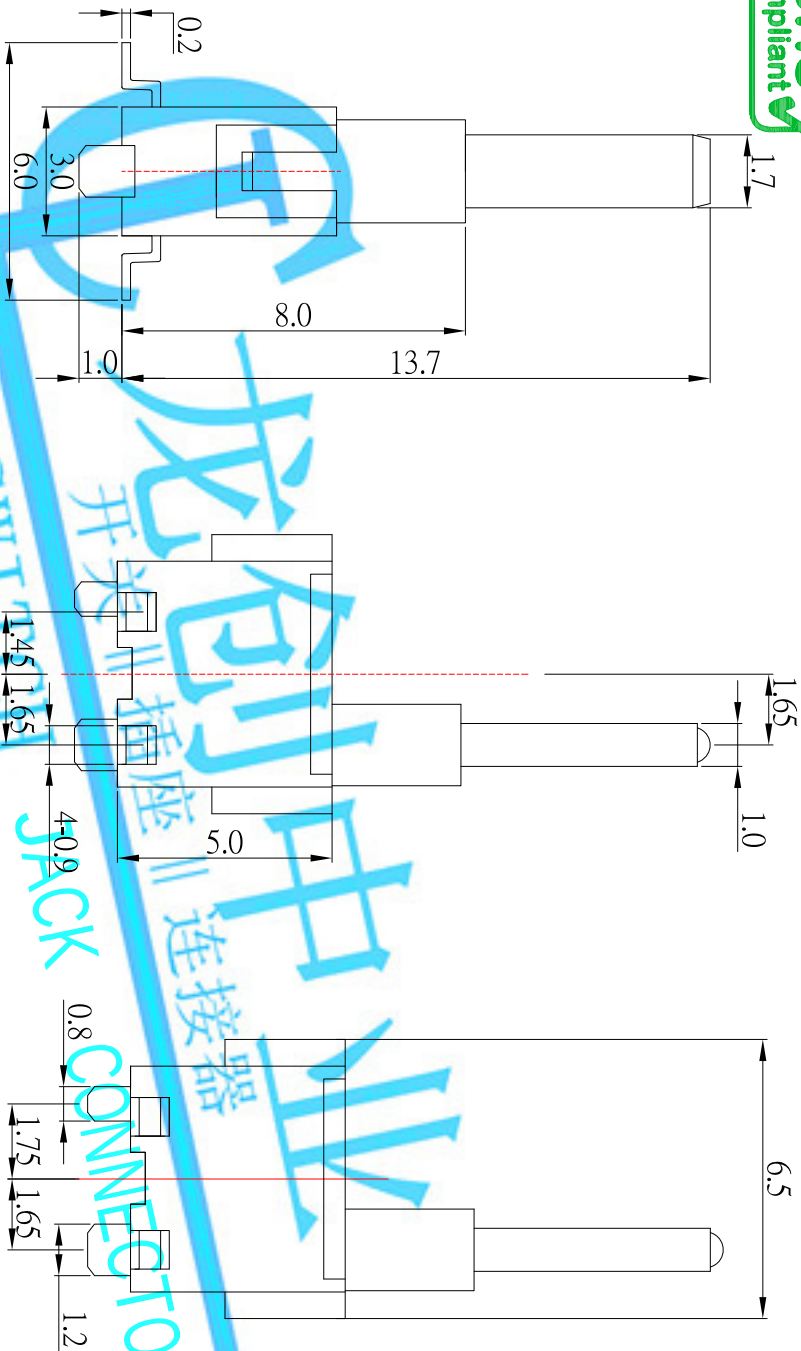

P.C.B LAYOUT

SPECIFICATIONS

Rating	DC 12V 0.1A
Contact Resistance	100mΩ Max
Insulation Resistance	50MΩ Min
Operating Force	40 ±20gf
Life	100,000 cycles



CIRCUIT DIAGRAM

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS OTHERWISE STATED:	Up to 5 Above 5 ~ 15 Above 15 ~ 30 Above 30 ~ 50	±0.2 ±0.3 ±0.4 ±0.5
ANGLE	3RD. ANGELS	±0.3°

E	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED
D	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED
C	COVER	PA46	1	BLACK
B	CASE	PA46	1	BLACK
A	KNOB	PA46	1	BLACK
NO.	PARTS	MATERIALS	QTY	FINISH
DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	09/26/13			
CHECKED BY:	DATE	FINISH	MODLE	DETECTOR SWITCH
Jacky Chen	09/26/13			
APPROVED BY:	DATE	SCALE	DWG NO.	K5-1677SA-01
Tony Kao	09/26/13			
		SHEET NO.	PART NO.	K5-1677SA-01
		1 of 1		
				SIZE
				A4
				VER
				R