




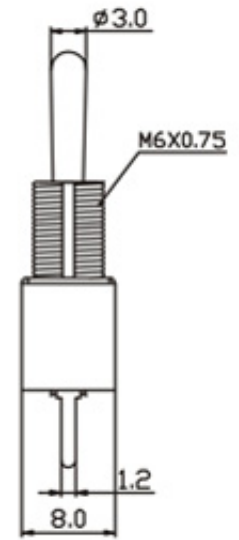

RoHS
Compliant
2002/95/EC

REV	DESCRIPTION	DESIGNER	DATE

自由公差		
区分	类别	公差
0	<0.5	±0.10
0.50	<5	±0.15
5.0	<10	±0.20
10.0	<20	±0.30
20.0	<50	±0.40
未标注R角		R0.2
未标注角度公差		±1°

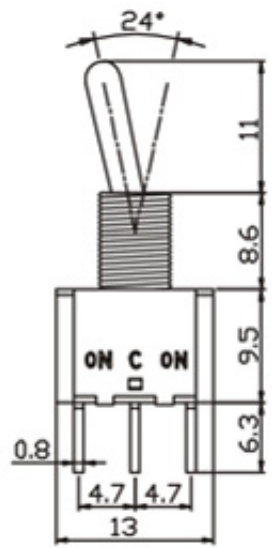

技术特性 Specification

- 规格 Rating:6A 125VAC;3A 250VAC
- 接触电阻 Contact Resistance:20mΩ max
- 绝缘电阻 Insulation Resistance:500VDC 1000MΩ min
- 耐电压 Dielectric Strength:1500VAC ,1Minute
- 操作温度 Operating Temperature:-25℃ ~ +85℃
- 电气寿命 Electrical Life:10,000 Cycles

SCALE	1:1		UNIT: mm
APVD		DATE	2017-5-22
CKD	单世佳	DWN	徐耀飞
SPECIFICATION NO.	ZF-ZRS-		
DESCRIPTION	TOGGLE SWITCH		
MODEL NO.	MTS-102-A2-MO MTS-103-A2-MO		
PART No.	SPDT 3P		

NO	NAME	MATERIAL	QTY	FINISHING	NO	NAME	MATERIAL	QTY	FINISHING

LONGCHUANG ZHONGYE (HK)CO.,LIMITED