


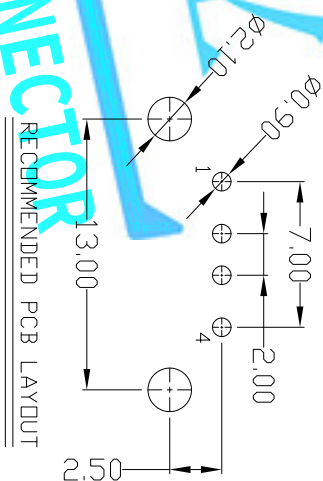



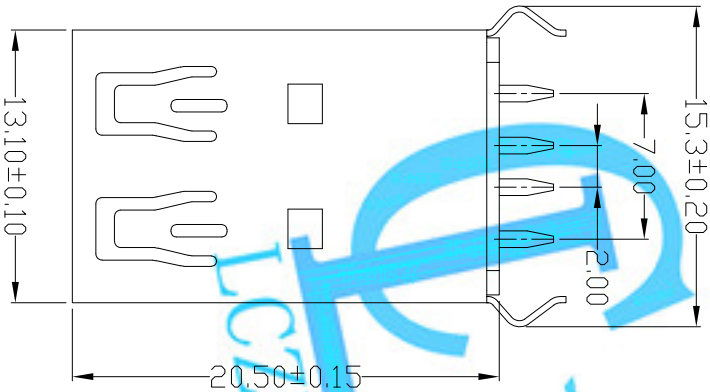

RoHS
Compliant
2002/95/EC

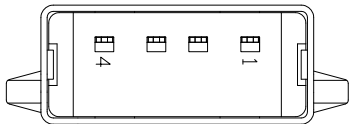

Bill of materials:

3	HOUSING	PBT+30%GF	1	UL94V-0
2	SHELL	COPPER ALLOY / SPCC	1	PLATED NICKEL
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN
ND	PARTS	MATERIAL	QTY	FINISHING

X: ±0.35	X': ±2'
X: ±0.3	X': ±1'
.XX ±0.25	.XX'
.XXX ±0.15	.XXX'

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	SEE NOTE

TITLE:	USB AF DIP 180度 全包
DR:	Rudky 2018/11/22
CHKD:	Rudky 2018/11/22
APPD:	

PART NO.:	USAF-04XN-1XPZ211
DWG NO.:	AI1-PZ211
SCALE	1:1
SHEET	1/1
REV.	B
CUSTOMER DRAWING	

- NOTES:
1. ELECTRICAL:
- 1) VOLTAGE CURRENT RATING: 2AMP,30V AC;
 - 2) INSULATION RESISTANCE: 1000MΩ MIN;
 - 3) CONTACT RESISTANCE: 30mΩ MAX;
 - 4) WITHSTANDING VOLTAGE: 500V AC;
 - 5) OPERATING TEMPERATURE: -55°C TO +85°C.
2. Mechanical:
- 1) Mating Force: 35N MAX
 - 2) Umating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▲" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04XN-1XPZ211

1Au 1u"
6Au 30u"
W/WHITE
B/BLACK
1PBT
2PA6T
3PA9T
4LCP

REV	LTR	DESCRIPTION	DATE	REVISER	APPD