


ROHS

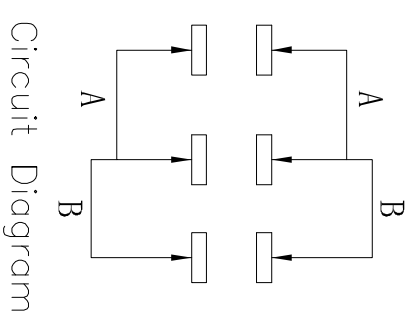

Circuit Diagram

PART NO.	L	Operating force
AS-1280S-F3	2	200±100gf
AS-1280S-K3	3	
AS-1280S-L3	4	

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Contact Spring	—	2	Beryllium copper	Ag Plated	—
④	Terminal	—	3	Brass Strip	Ag Plated	—
③	Bose	—	1	NYLON	Sunton	—
②	Cover	—	1	SUS	Natural	—
①	KnOB	—	1	NYLON	White	—

APPROVALS		DATE	LONGCHUANG ZHONGYE (HK)CO.,LIMITED
DRAWN	J.X.Zhang	2013/9/26	

CHECKED		TITLE:		MINI Slide Switch	
APPROVALS		PART NO.		AS-1280S	
TOLERANCES ARE		$30 \sim 12.5 \mu$ ±0.30 $10 \sim 30$ ±0.20 $5 \sim 10$ ±0.15 ~ 5 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
			±2°	DRAWING NO.	PROD.   SHEET 1 OF 1