
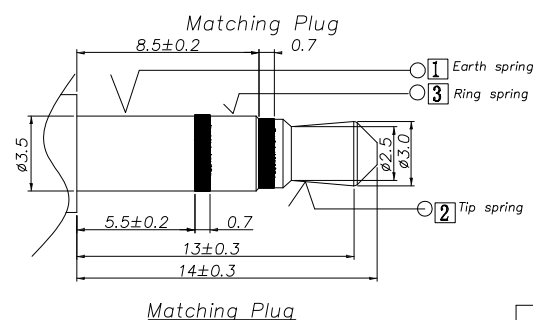
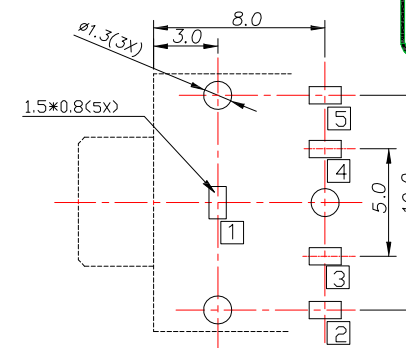
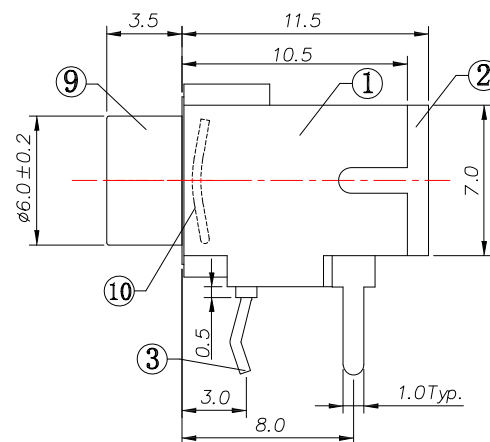


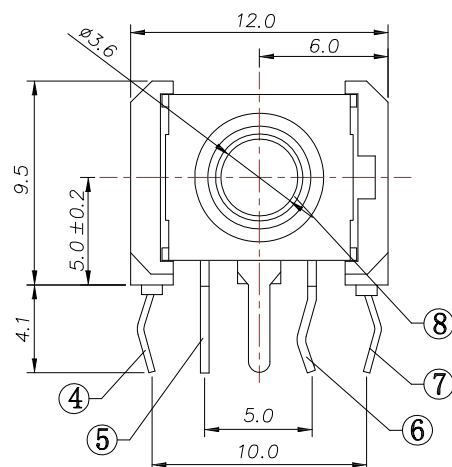

Model No.	PJ-3685	PJ-3684A	PJ-3683A	PJ-3683	PJ-3682
Schematic					

⑩	spring	1	SPRING WIRE	Ni-Plating
⑨	Bushing	1	PBT	
⑧	Bushing	1	COPPER ALLOY	Ni-Plating
⑦	Tip spring	5	PHOSPHOR BRONZE	Tin/Ag-Plating
⑥	Shurt terminal	4	BRASS	Tin/Ag-Plating
⑤	Shurt terminal	3	BRASS	Tin/Ag-Plating
④	Ring spring	2	PHOSPHOR BRONZE	Tin/Ag-Plating
③	Earth spring	1	BRASS	Tin/Ag-Plating
②	Cover	1	PBT	Black
①	Housing	1	PA66	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

- 1.Rating : DC 30V 0.5A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

DRAWN BY:		DATE	MATERIAL		TITLE		JACK	
Jack Lu		03/16/18			MODLE		PHONE JACK	
CHECKED BY:		DATE	FINISH		DWG NO.		PJ-368x-S141	
Jacky Chen		03/16/18	SCALE		1 : 1		SIZE	
APPROVED BY:		DATE	SHEET NO.		PART NO.		VER	
Tony Kao		03/16/18	1 of 1		PJ-368x-S141		R	

LONGCHUANG ZHONGYE (HK)CO.,LIMITED

TOLERANCE UNLESS
OTHERWISE STATED :

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM