


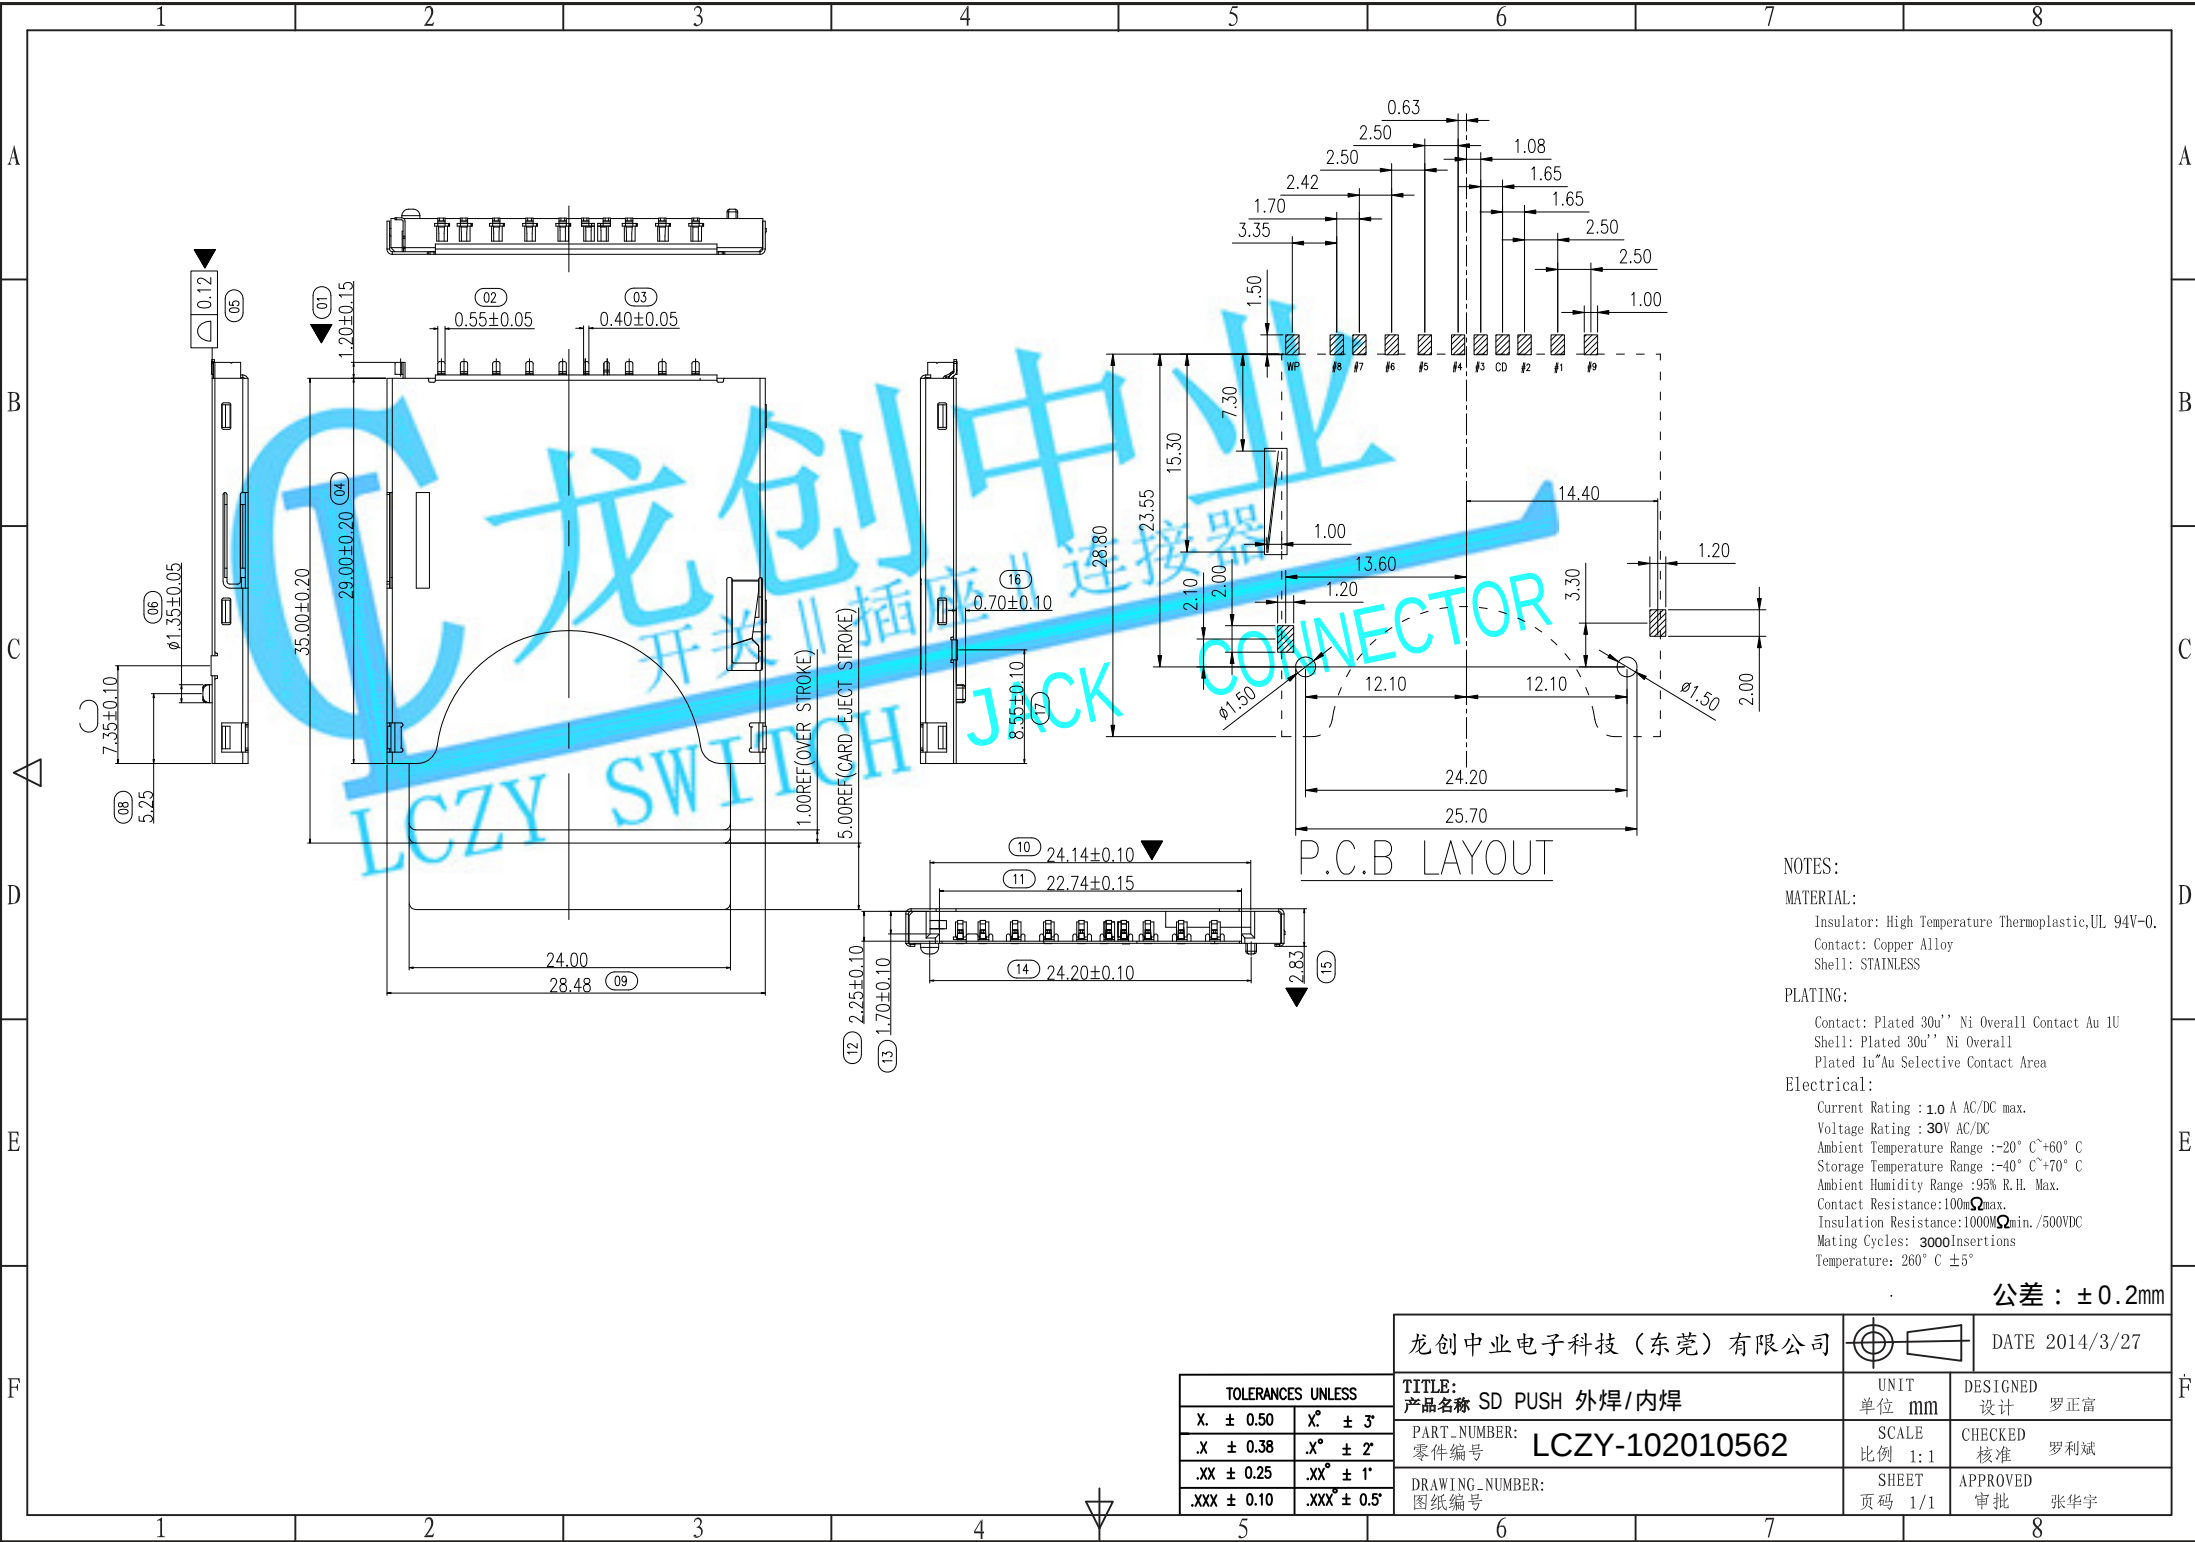

NOTES:

MATERIAL:

Insulator: High Temperature Thermoplastic,UL 94V-0.

Contact: Copper Alloy

Shell: STAINLESS

PLATING:

Contact: Plated 30u'' Ni Overall Contact Au 1u

Shell: Plated 30u'' Ni Overall

Plated 1u''Au Selective Contact Area

Electrical:

Current Rating : 1.0 A AC/DC max.

Voltage Rating : 30V AC/DC

Ambient Temperature Range :-20° C~+60° C

Storage Temperature Range :-40° C~+70° C

Ambient Humidity Range :95% R.H. Max.

Contact Resistance:100mΩmax.

Insulation Resistance:10000Ωmin./500VDC

Mating Cycles: 3000Insertions

Temperature: 260° C ±5°

公差：±0.2mm

龙创中业电子科技（东莞）有限公司				DATE 2014/3/27	
TITLE: 产品名称 SD PUSH 外焊/内焊		UNIT 单位 mm		DESIGNED 设计 罗正富	
PART NUMBER: 零件编号 LCZY-102010562		SCALE 比例 1:1		CHECKED 核准 罗利斌	
DRAWING NUMBER: 图纸编号		SHEET 页码 1/1		APPROVED 审批 张华宇	

TOLERANCES UNLESS	
X. ± 0.50	X° ± 3°
.X ± 0.38	.X° ± 2°
.XX ± 0.25	.XX° ± 1°
.XXX ± 0.10	.XXX° ± 0.5°