

REV.	DESCRIPTION	DATE
A/0	新版发行	2016.11.28

技术要求:







- 1、塑件材料: LCP (UL-94V-0)
- 2、接触件: 黄铜镀锡
- 3、接触电阻: $\leq 20\text{m}\Omega$
- 4、绝缘电阻: $\geq 500\text{M}\Omega$
- 5、额定电压: 125V AC DC
- 6、额定电流: 1.0A AC DC
- 7、耐压: 能承受500V AC/Min ute
- 8、工作温度: $-25^{\circ}\sim +105^{\circ}$
- 9、可焊性试验: 浸锡面积 $\geq 95\%$ 温度 $260^{+5}_{-0}\text{^{\circ}a}$, 时间 2.5 ± 0.5 秒
- 10、铅和镉等六大有害物质含量要符合环保要求

PH-1.5-XP-WT

Circuits	Dimensions (mm)		
	A	B	C
02	1.50	3.60	6.00
03	3.00	5.10	7.50
04	4.50	6.60	9.00
05	6.00	8.10	10.50
06	7.50	9.60	12.00
07	9.00	11.10	13.50
08	10.50	12.60	15.00
09	12.00	14.10	16.50
10	13.50	15.60	18.00
11	15.00	17.10	19.50
12	16.50	18.60	21.00
13	18.00	20.10	22.50
...	...	...	...
20	28.50	30.60	33.00

3	焊片 Fitting Nail	黄铜 Brass	2	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡80u"MIN.
2	端子 Contact	黄铜 Brass	n*1	电镀(锡): 整个表面镀底锡30u"MIN, 再镀锡80u"MIN.
1	基座 Wafer	LCP (UL94V-0)	1	本色
序号	名称	材料	数量	附注

GENERAL TOLERANCES				DRAWN BY		龙创中业电子科技(东莞)有限公司	
0.X	±0.25	X. [°]	±3°	CHK. BY			
0.XX	±0.12			APRV. BY			
0.XXX	±0.05	X.X. [°]	±0.5°	DRAWING NO.		SHEET	PROD. NAME -
UNIT	SIZE	SCALE		006-0082-001		1 OF 1	PART NO. PH-1.5-XP-WT
MM	A4	1:1		TITLE		1.50 FPC CONN. ZIF SMT FRONTFLIP H=2.0 DOUBLE LOWER CONTACT	

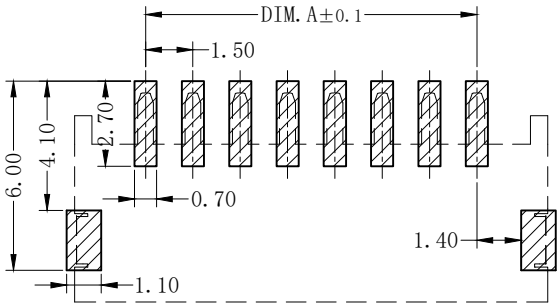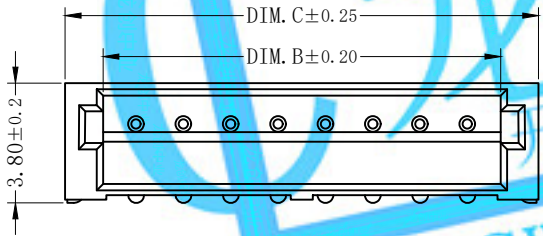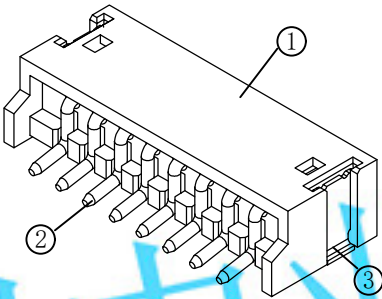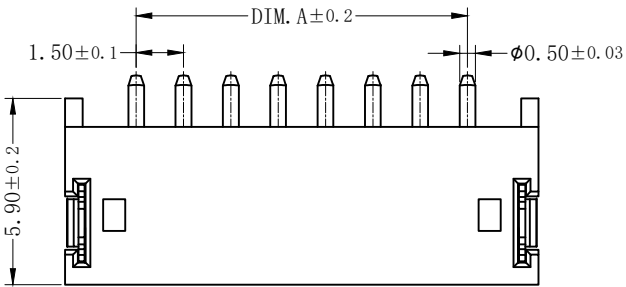

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

借用登记

旧底图总号

底图总号

签字

日期