

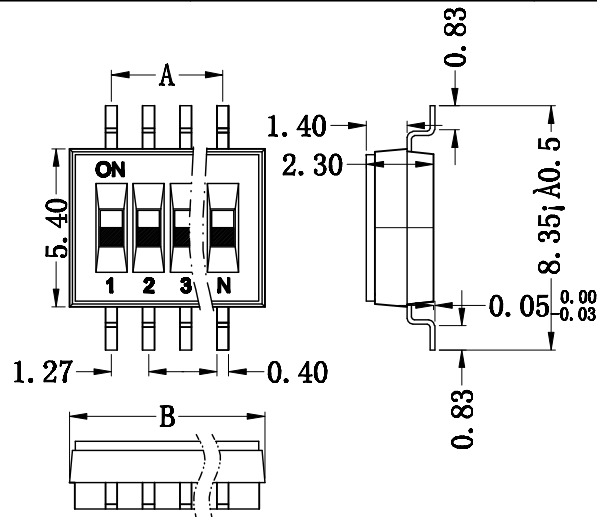
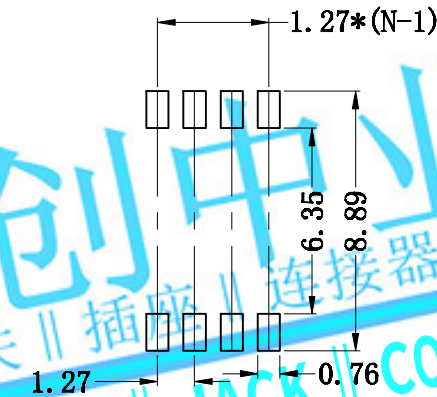




Schematic



RECOMMENDED P. C. B. LAYOUT (TOP VIEW)

Notes:

1. Specations:

- 1). Operating force: 1000gf Max
- 2). operating temperature: -30° to +85°
- 3). storage temperature: -40° to +85°
- 4). Mechanical life: 3000cycles minimum

2. PLATING:

GOLD FLASH 1u" (min.) SOLDER TAIL
3u" GOLD PLATING ON THE CONTACT AREA,
WITH 50u" NICKEL UNDER PLATING COVER ALL .

3 Part NUMBER DESCRIPTION

DSHP XX T S G E R

(包装方式: T=管装 R=Reel)

(电镀层: E=接触部 3u", G=接触部 3u"/焊接部 1-2u")

(G=镀全金 S=内金外锡)

(脚型: S脚/J脚)

(T=低推贴胶 S=低推不贴胶)

(产品P数: 02=2P, 04=4P, 06=6P, 08=8P)

DIMINTIONS			DIMINTIONS		
POS.	A	B	POS.	A	B
2P	1.27	4.14	4P	3.81	6.68
3P	2.54	5.41	6P	6.35	9.22
5P	5.08	7.95	8P	8.89	11.76
			10P	11.43	14.30

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3u"Gold
④	Terminal	Brass	1u"Gold
⑤	Base	UL94 V0	Black
⑥	Termincal contact	Brass	3u"Gold

单位	材质	硬度	数量	龙创中业电子科技 (东莞) 有限公司					
mm				核准		物料编号		模具编号	
NORMAL DIMENSION TOLERANCE				审核					
X.00±0.05		0.00° ± 0.25°		设计		产品型号		产品名称	
X.0±0.1		0.0° ± 0.5°		绘图	He 2015/12/11	DSHPxxTSGER		1.27成品图	
X±0.25		0° ± 1°		第三角法		页码	001	比例	1/1
								S脚	

版本	日期	发行原因	绘图	核准
A				