

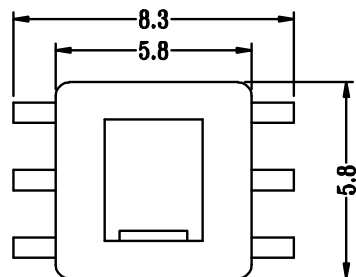
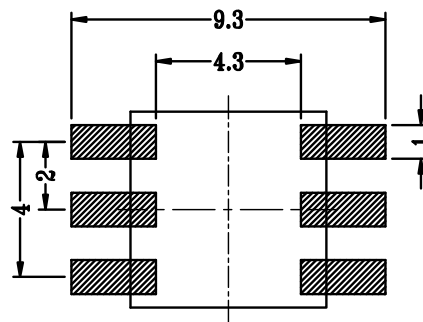





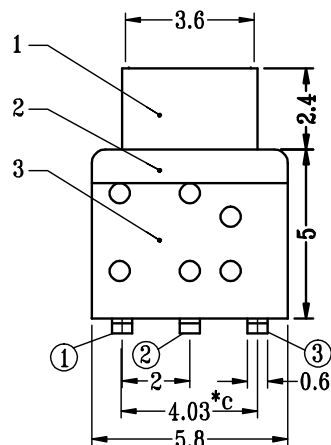


RoHS

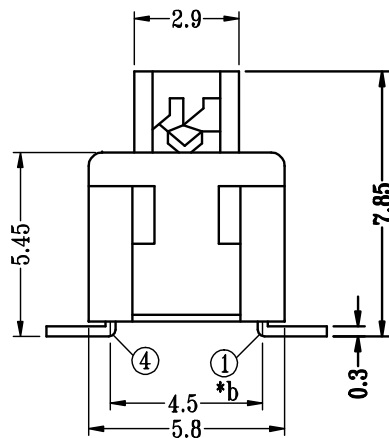

SCHEMATIC (NON-SHORTING)

P.C.B LAYOUT
BOTTOM VIEWpublic errand (公差) : $\pm 0.2\text{mm}$ unit (单位) : mm

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	PPA/LCP/尼龙
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 底座	PPA/LCP/尼龙
Pin 引脚	铜 (镀银)
Upper cover上盖	PPA/LCP/尼龙

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.5A
Contact impedance(接触阻抗):	$\leq 100\text{m}\Omega\text{MAX}$
Insulation impedance(绝缘阻抗):	$\geq 100\text{M}\Omega\text{MIN}$
Welding resistance temperature(耐焊温度):	$250 \pm 5^\circ\text{C}$
OPERATING LIFE(电气寿命):	10,000 cycles
Usage temperature(使用温度):	-25°C to 80°C
Operating humidity(使用湿度):	$\leq 85\%\text{RH}$
Trip(行程):	$1.5 \pm 0.2\text{mm}$
Operating force(操作力):	1 2 3 4 5 6 200 $\pm$ 50gf

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-5852S			CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	UP TO 5	± 0.2	ANGLE	APPROVAL	DATE	K8-09-2019
mm	OTHERWISE	ABOVE 5 ~ 30	± 0.3	$0^\circ \pm 3^\circ$	SCALE	PAGE	1 OF 1
		ABOVE 30	± 0.5				
		ANGLE	$\pm 3^\circ$				

K8-5852S-□-□