









RoHS

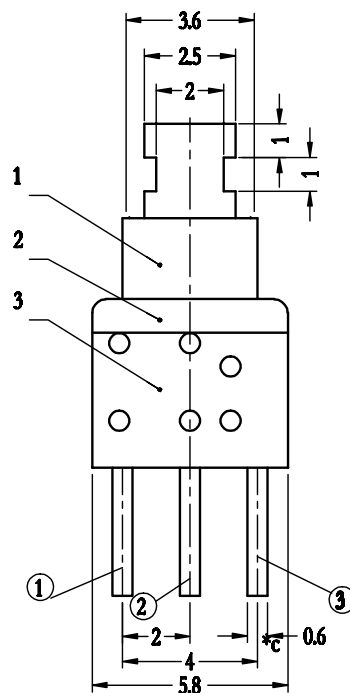

SCHEMATIC (NON-SHORTING)

P.C.B LAYOUT
BOTTOM VIEW

function(功能) :

NO.1	
PART NO	
L	自锁
N	无锁

Material:

Button 按钮	PPA/LCP/尼龙
crochet hook钩针	不锈钢 (复银)
spring 弹簧	黄铜 (镀银)
Base 底座	PPA/LCP/尼龙
Pin 引脚	铜 (镀银)
Upper cover上盖	PPA/LCP/尼龙

Main technical specifications:

Rated load(额定负荷):	DC 30V 0.5A
Contact impedance(接触阻抗):	≤100mΩ MAX
Insulation impedance(绝缘阻抗):	≥100MΩ MIN
Welding resistance temperature(耐焊温度):	250±5 ° 5s
OPERATING LIFE (电气寿命):	10,000 cycles
Usage temperature (使用温度):	-25 °C to 80 °C
Operating humidity (使用湿度):	≤85% RH
Trip(行程):	1.5±0.2mm
Operating force(操作力):	1 2 3 4 5 6 200±50gf
NO.2	

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K8-5851D			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	APPROVAL	DATE	K8-09-2019	1 OF 1
	mm	OTHERWISE	ABOVE 5 ~30				
			ABOVE 30	SCALE	2:1	PAGE	
			ANGLE				
			±0.2				
			±0.3				
			±0.5				
			±0.5				
			0°±3°				

K8-5851D-□-□