

RoHS

4 8

Height(高度) :



NO.1

PART NO	H
D	3.2
F	3.6





PART NO.

Circuit Diagram

K2-1110SW



K2-1110SF

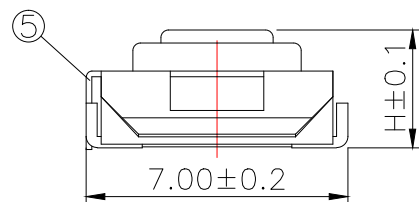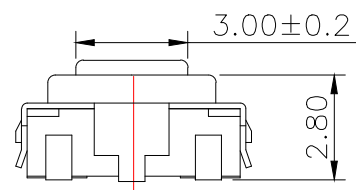

Material:

Button 按钮	PPA/LCP耐温280
Cover plate 盖板	铜 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	PPA/LCP耐温280
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE(电气寿命):	100,000 cycles
Usage temperature(使用温度):	-25 to 85
Operating humidity(使用湿度):	≤ 85% RH
Trip(行程):	0.25 ± 0.1mm
Operating force(操作力):	1 90 ± 30gf 2 130 ± 30gf 3 180 ± 50gf 4 250 ± 50gf 5 350 ± 50gf 6

PCB Layout(Pattern side)

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	K2-1110SW			CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	K2-09-2019
mm	OTHERWISE	ABOVE 5 ~ 30	±0.3	0° ± 3°	SCALE	PAGE	1 OF 1
		ABOVE 30	±0.5				
		ANGLE	±3°				

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

K2-1110SW/K2-1110SF-□-□