




RoHS

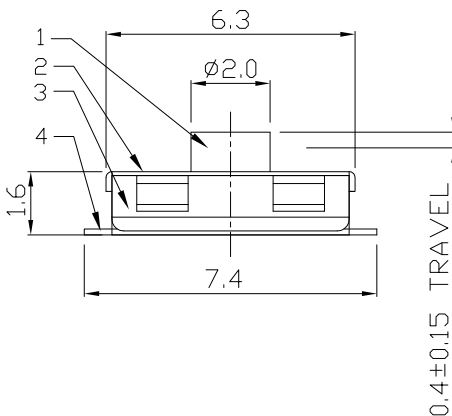


P.C.B MOUNTING PATTERN DIMENSION

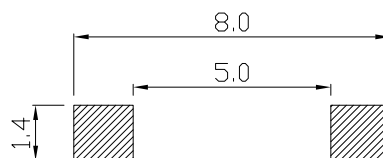

CIRCUIT DIAGRAM

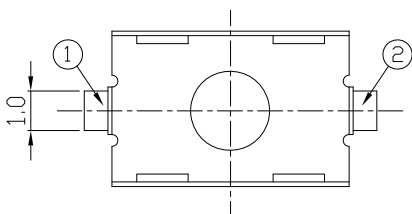

PCB Layout(Pattern Side)



Circuit Diagram

public errand (公差) : ±0.2mm unit (单位) : mm

Height(高度) :

NO.1	
PART NO	H
D	2.6
F	

Material: 防水IP65

Button 按钮	PPA/LCP
Cover plate 盖板	铜 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	PPA/LCP
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s		
OPERATING LIFE(电气寿命):	50,000 cycles		
Usage temperature(使用温度):	-25 to 85		
Operating humidity(使用湿度):	≤ 85% RH		
Trip(行程):	0.4 ± 0.15mm		
Operating force(操作力):	1	2	3
	90 ± 30gf	130 ± 30gf	250 ± 50gf
	3	4	5
	180 ± 50gf	350 ± 50gf	

NO.2

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K2-1111ST		CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3	ANGLE 0°±3°	APPROVAL		DATE		K2-09-2019	
	mm					SCALE		PAGE		1 OF 1	

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

K2-1111ST-□-□