

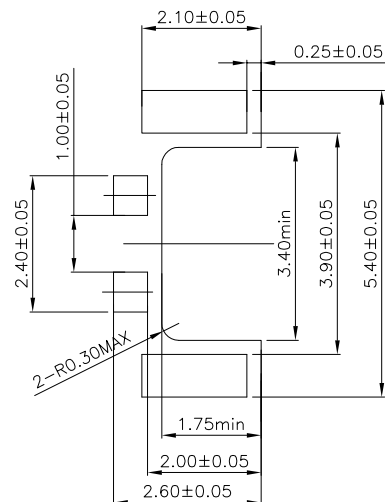

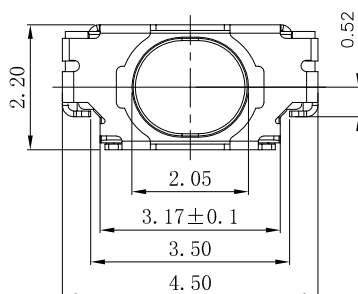


RoHS

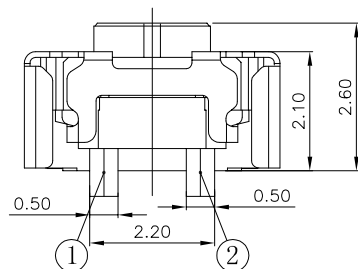

PCB Layout(Pattern side)



Circuit Diagram

Height(高度) :

NO.1	
PART NO	H
D	2.6
F	

Material:

Button 按钮	PBT/LCP耐温280
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	PBT/LCP耐温280
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s		
OPERATING LIFE (电气寿命):	600,000 cycles		
Usage temperature (使用温度):	-25 to 85		
Operating humidity (使用湿度):	≤ 85% RH		
Trip(行程):	0.15 ± 0.05mm		
Operating force(操作力):	1	2	
	3	180 ± 50gf	4
	5		250 ± 50gf
	6		

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH				DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		K2-1848FP				CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	K2-09-2019	
	mm		ABOVE 5 ~30	±0.3		ABOVE 30	±0.5		
				±3°					

K2-1848FP - □ - □