
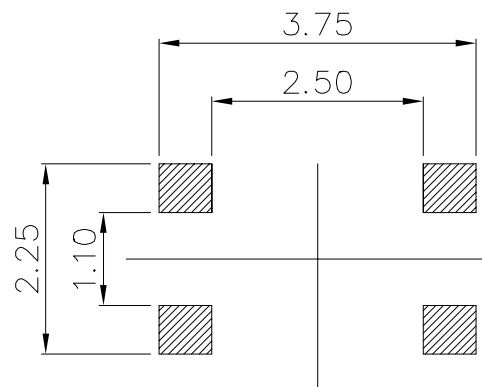



RoHS


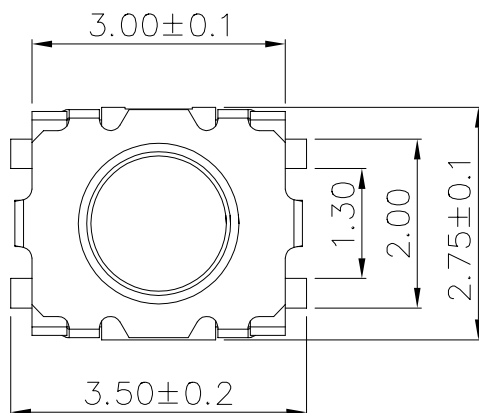


Height(高度) :

NO.1	
PART NO	H
D	1.4
F	

Material:

Button 按钮	硅胶
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	PBT/LCP耐温280
Pin 引脚	磷铜 (镀银)

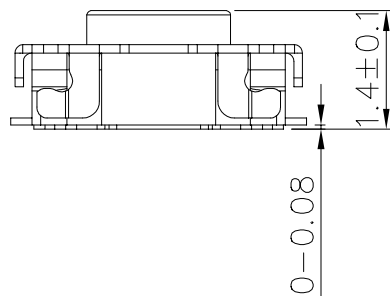

Circuit diagram

Main technical specifications:

Rated load(额定负荷):	DC 15V 20mA
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE (电气寿命):	500,000 cycles
Usage temperature (使用温度):	-25 to 85
Operating humidity (使用湿度):	≤ 85% RH
Trip(行程):	0.15 ± 0.05mm
Operating force(操作力):	1 2 3 180 ± 50gf 4 250 ± 50gf 5 6

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K2-1849SN		CHECK		Z.LIU		REV.		A1	
UNIT :	mm	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3	ANGLE 0°±3°	APPROVAL		DATE		K2-09-2019	
						SCALE		PAGE		1 OF 1	

K2-1849SN-□-□