

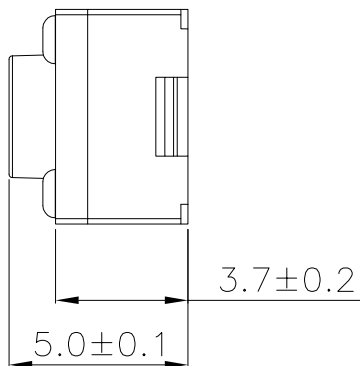


RoHS

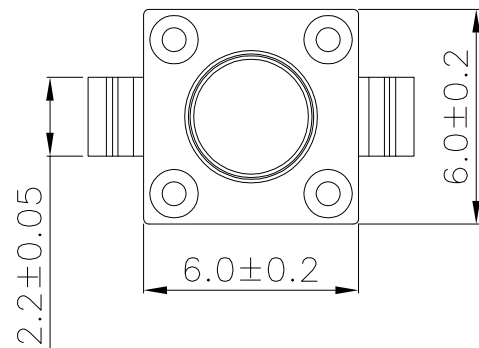



Circuit Diagram

Height(高度) :

NO.1	
PART NO	H
D	
F	5.0

Material:

Button 按钮	LCP耐温280
Cover plate 盖板	磷铜 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 基座	LCP 耐温 280℃
Pin 引脚	磷铜 (镀银)

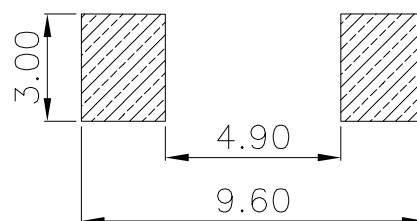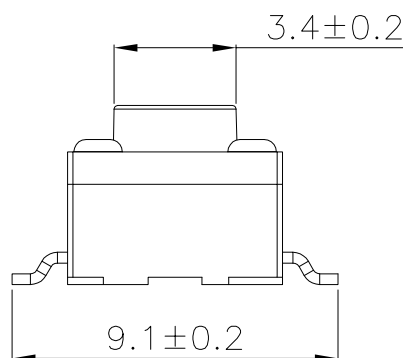

PCB Layout(Pattern side)

Main technical specifications:

Rated load(额定负荷):		DC 12V 50mA		
Contact impedance(接触阻抗):		≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):		≥ 100MΩ MIN		
Welding resistance temperature(耐焊温度):		250 ± 5 ° 5s		
OPERATING LIFE(电气寿命):		100,000 cycles		
Usage temperature(使用温度):		-25 to 85		
Operating humidity(使用湿度):		≤ 85% RH		
Trip(行程):		0.25 ± 0.1mm		
Operating force(操作力):	1	90 ± 30gf	2	130 ± 30gf
	3	180 ± 50gf	4	250 ± 50gf
	5	350 ± 50gf	6	

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		K2-6625SP		CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3	ANGLE 0°±3'	APPROVAL		DATE		K2-09-2019	
						SCALE		PAGE		1 OF 1	

K2-6625SP - □ - □

B

A