

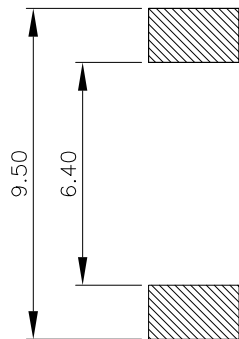
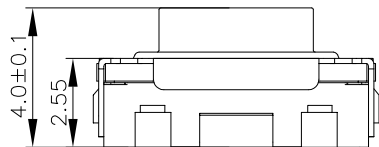
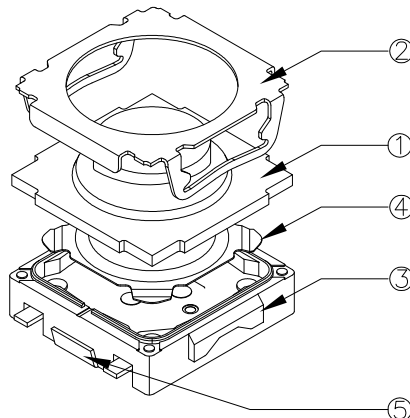


RoHS

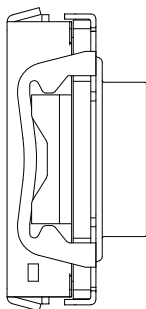

PCB Layout(Pattern side)

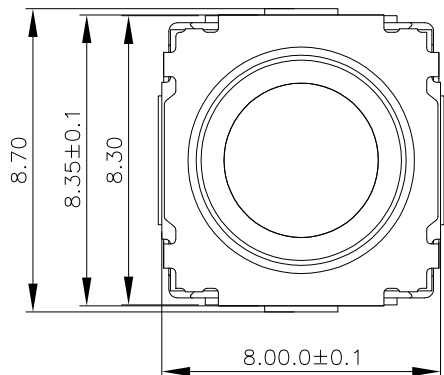

Height(高度) :

NO.1	
PART NO	H
D	4.0
F	

特点:防水等级IP67

Material:

Button 按钮	硅胶
Cover plate 盖板	铁 (镀银)
Shrapnel 弹片	不锈钢 (复银)
Base 底座	PBT/LCP耐温280
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE (电气寿命):	500,000 cycles
Usage temperature (使用温度):	-25 to 85
Operating humidity (使用湿度):	≤ 85% RH
Trip(行程):	0.9 ± 0.1mm
Operating force(操作力):	1 2 3 4 5 300 ± 50gf 6

NO.2

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH				DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		K2-1812SA				CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL	DATE	K2-09-2019	
	mm		ABOVE 5 ~30	±0.3					
			ABOVE 30	±0.5					
			ANGLE	±3°	SCALE	2:1	PAGE	1 OF 1	

K2-1812SA- □ - □