

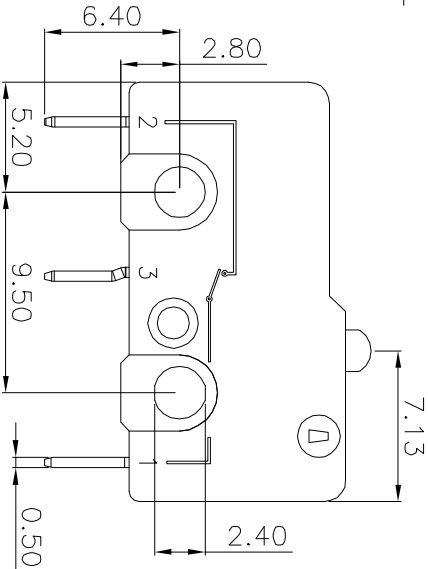
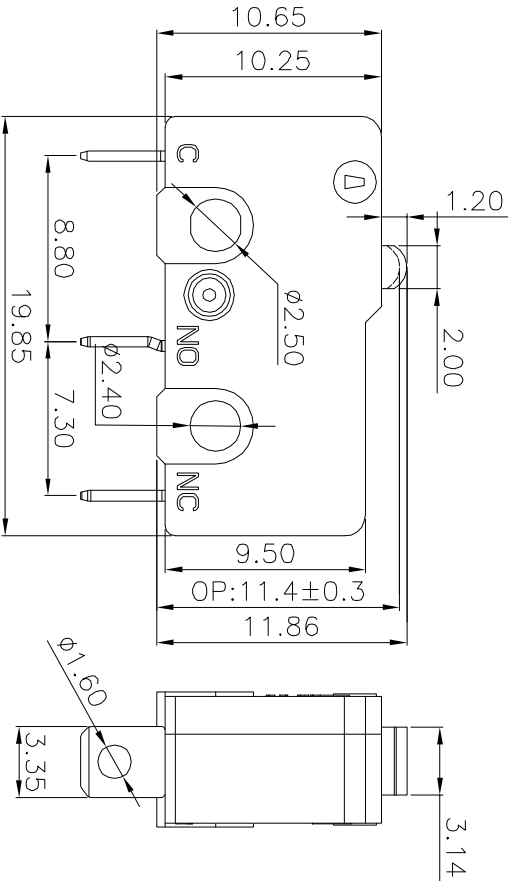
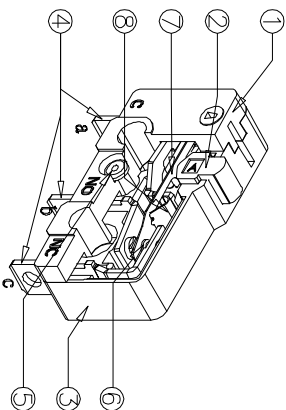



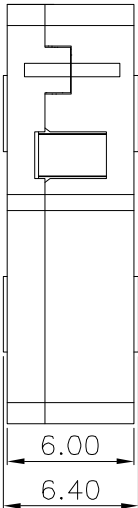

NOTE:
1.Rating:AC125V 5A/250V 3A
2.Operating froce:100±30gf
3.Mechanical Life:100,000
3.Electrical Life:6000-10,000



Circuit Diagram

	A		NEW				
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	

⑧	Shrapnel 2	—	1	Copper Alloy	—	—
⑦	Shrapnel 1	—	1	Beryllium Copper	—	—
⑥	Contact	—	1	Copper Alloy	Plating silver	—
⑤	Aluminium rivet	—	1	Aluminium Alloy	—	—
④	Terminal	—	3	Copper Alloy	Plating silver	—
③	Housing	—	1	PBT	Block	—
②	Knob	—	1	PBT	Block	—
①	Cover	—	1	PBT	Block	—
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.09.3		TITLE: MICRO SWITCHS		
CHECKED				PART NO. K9-1910B		
APPROVALS						
TOLERANCES ARE		30~125H ±0.30	ANGLE	UNIT: mm		
10~20 ±0.25		5~10 ±0.20	±2°	SCALE: 1:1		
~ 5 ±0.20				PROJ:		
		DRAWING NO.		SHEET 1 OF 1		