

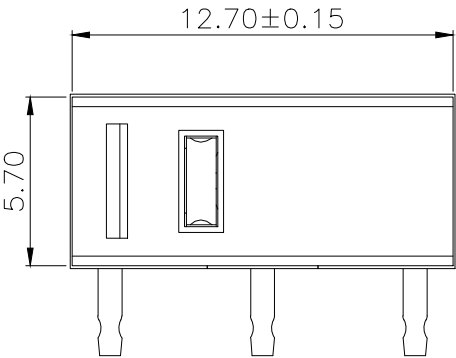
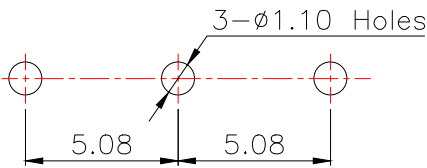
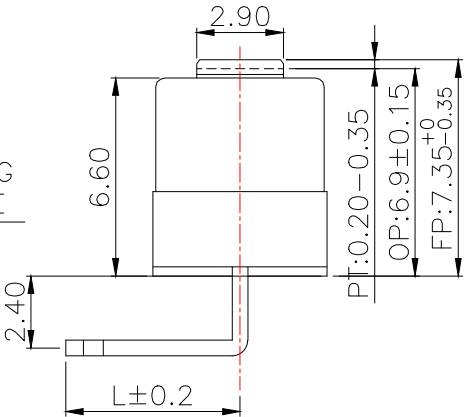
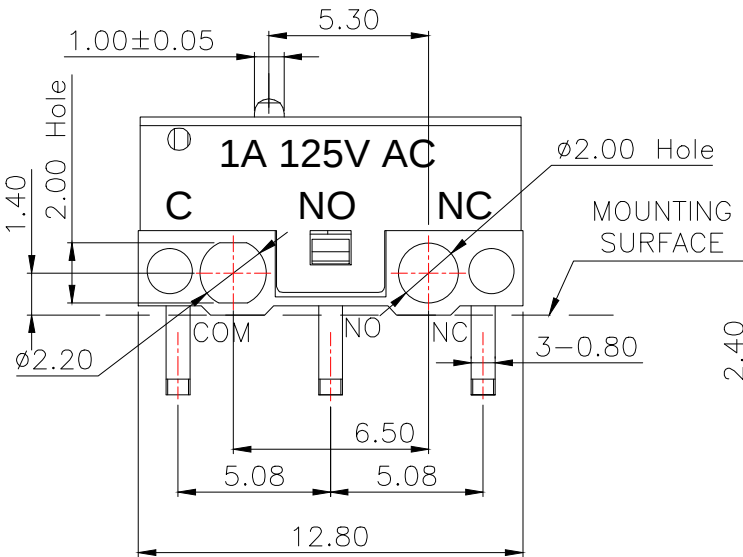


Circuit Diagram

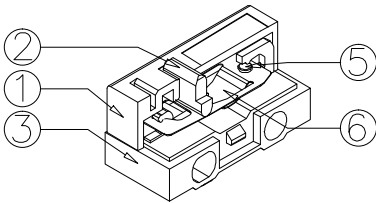

P.C.B layout





NOTE:
1.Rating:DC30V 0.1A
2.OP:6.90±0.15
3.Operating force:80±15gf
4.Mechanical Life:300,000


L	PART NO.
6.90	K9-1267C01-L
13.25	K9-1267C02-L

⑥	Shrapnel	——	1	Phosphor copper	——	——
⑤	Contact	——	1	Silver Alloy	——	——
④	Terminal	——	3	Brass(0.52t)	Plating silver	——
③	Housing	——	1	PBT	White	——
②	Knob	——	1	PBT	White	——
①	Cover	——	1	PBT	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN		S.L.L	2019.09.3			
CHECKED				TITLE:	MICRO SWITCHS	
APPROVALS				PART NO.		
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10				
				DRAWING NO.	——	SHEET 1 OF 1





	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

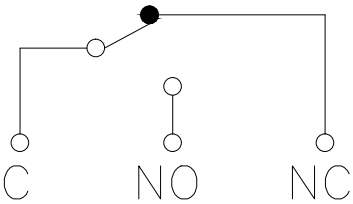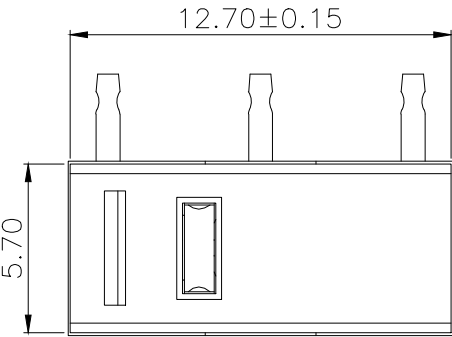

Circuit Diagram

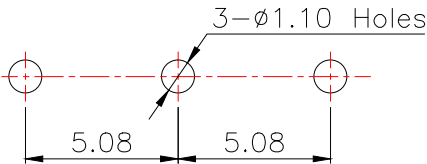

P.C.B layout

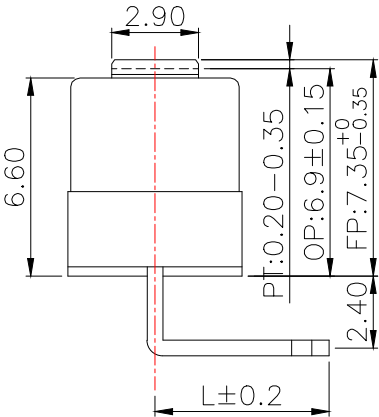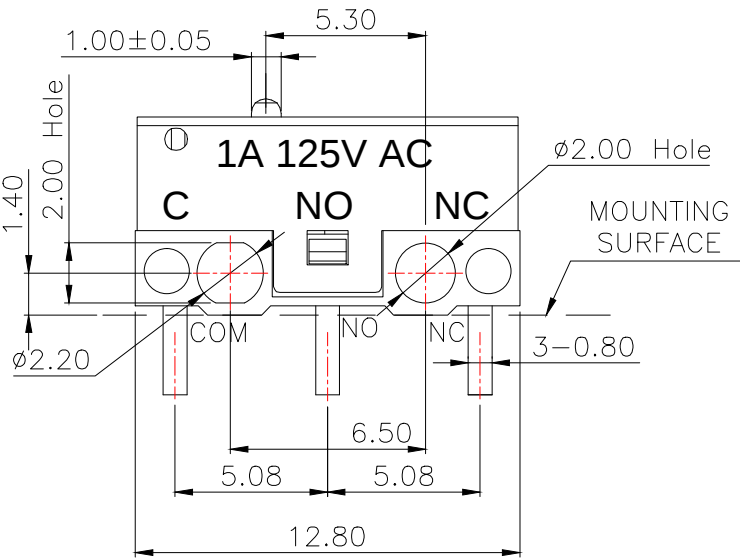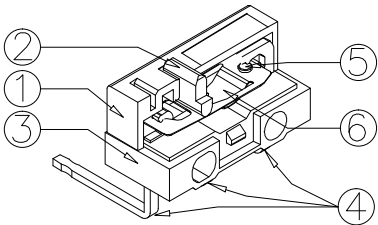

NOTE:
1.Rating:DC30V 0.1A
2.OP:6.90±0.15
3.Operating force:80±15gf
4.Mechanical Life:300,000

L	PART NO.
6.90	K9-1267C01-R
13.25	K9-1267C02-R

⑥	Shrapnel	——	1	Phosphor copper	——	——
⑤	Contact	——	1	Silver Alloy	——	——
④	Terminal	——	3	Brass(0.52t)	Plating silver	——
③	Housing	——	1	PBT	White	——
②	Knob	——	1	PBT	White	——
①	Cover	——	1	PBT	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN		S.L.L		2019.09.3		
CHECKED				TITLE: MICRO SWITCHS		
APPROVALS				PART NO.		
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10				
DRAWING NO.					SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			