




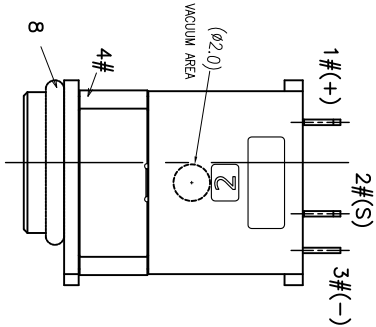
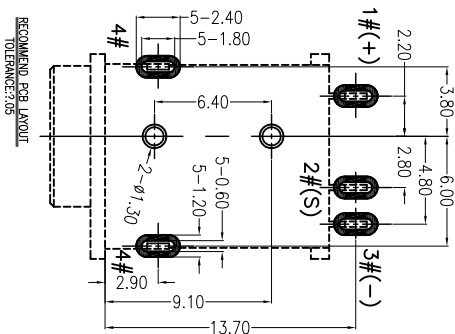
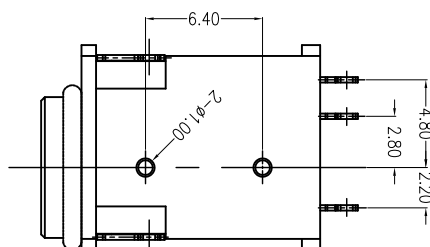
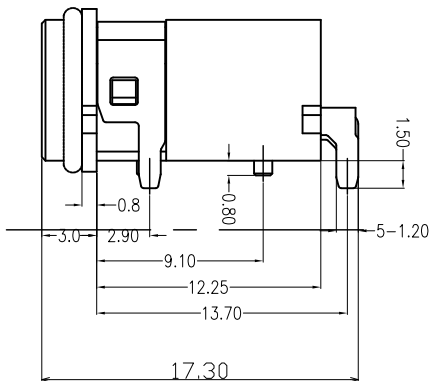





- Notes:
- 1.Current Rating: 24V & 5A Max.
 - 2.Contact Resistance: 50m Ohms Max.(initial)
 - 3.Insulation Resistance: 100M Ohms Min./500V DC
 - 4.Dielectric Withstanding Voltage: 500V AC/1Minute
 - 5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
 - 6.Durability: 5,000 Cycles
 - 7.Operating Temperature: -25°C to +85°C



Not to install the waterproof ring shipment

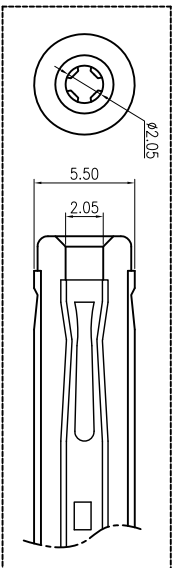

ITEM	NAME	QTY	DESCRIPTION
8	WATERPROOF RING	1	SILICONE, WHITE
7	GLUE	1	EPOXY, BLACK
6	BACK COVER	1	HIGH TEMPERATURE, BLACK
5	HOUSING	1	HIGH TEMPERATURE, BLACK
4	TERMINAL 4#	1	STAINLESS STEEL, NICKEL PLATING
3	TERMINAL 3#	1	COPPER ALLOY, NICKEL UNDERPLATING OVERALL, Au PLATING ON SOLDER AREA
2	TERMINAL 2#	1	COPPER ALLOY, NICKEL UNDERPLATING OVERALL, Au PLATING ON THE WHOLE
1	CENTER PIN	1	COPPER ALLOY, NICKEL UNDERPLATING OVERALL, Au PLATING ON SOLDER AREA

UNIT:MM	TYPE:	MODEL NO:	PAPER NO: A4	PAGE 1 OF 1
	DC JACK	DC-250A/2.0	TOLERANCE ±0.3	ANGLES ±2°
DESIGNER BY:			SCALE	VER
CHECK BY:			FULL	2
APPROVED BY:				

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD