
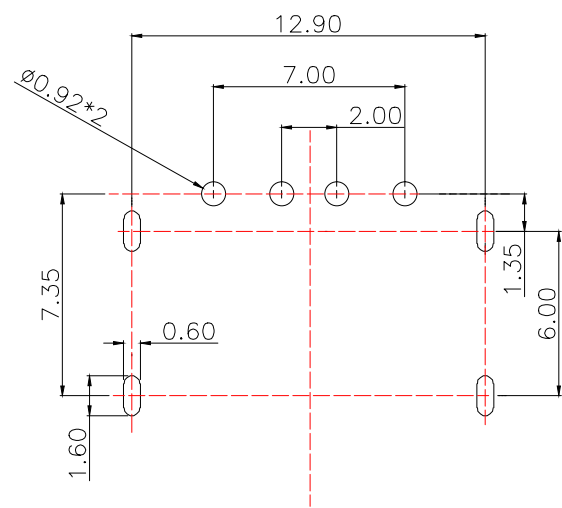
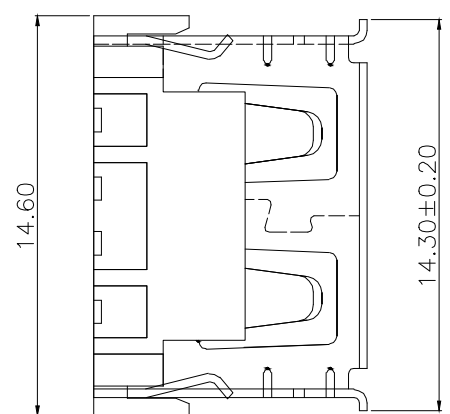
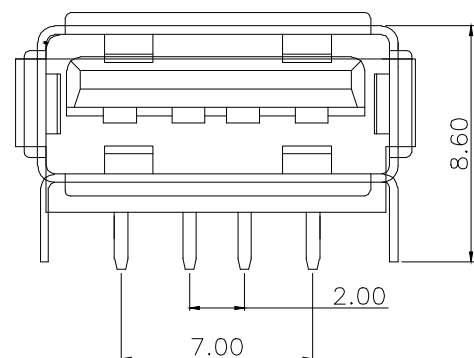





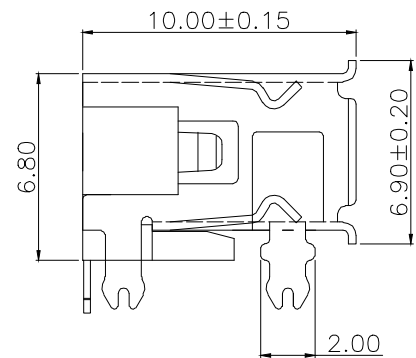


- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)

③	Base	—	1	NYLON	—	—
②	Terminal	—	4	Copper Alloy	Au/Sn Plated	—
①	Housing	—	1	Copper Alloy	Sn/Ni Plated	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD	
DRAWN		S.L.L	2019.10.12			
CHECKED					TITLE:	USB CONNECTOR
APPROVALS					PART NO.	U-A-24DD-Y-15
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	10~30	±0.25				
	5~10	±0.20				
	~ 5	±0.15				
			±2°	DRAWING NO.		SHEET 1 OF 1

	A					
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

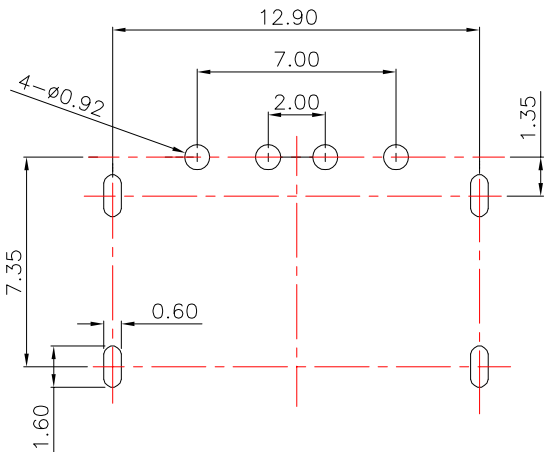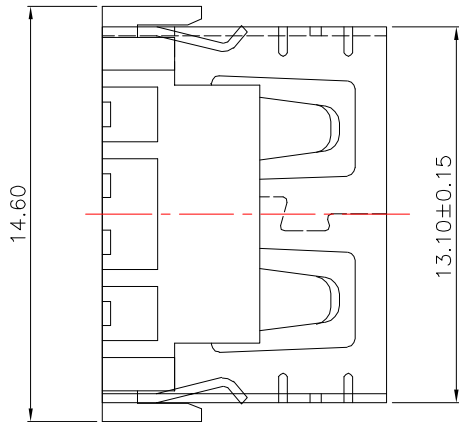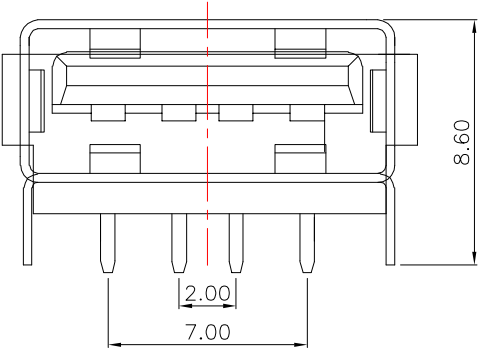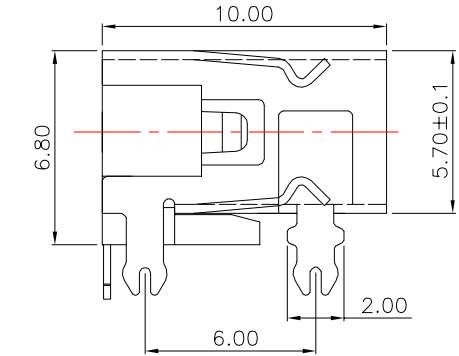

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

- NOTES:
- 1.ELECTRICAL PERFORMANCE,
CONTACT RESISTANCE:30MΩ MAX
CONTACT CURRENT RATING:1.5 A
DIELECTRIC WITHSTAND VOLTAGE,500V R.M.S
INSULATION RESISTANCE: 1000MΩ MIN
 - 2.MECHANICAL PERFORMANCE,
INSERTION FORCE: 3.57kgf Max
REMOVAL FORCE: 1.02kgf Min
DURABILITY: 5000 CYCLES.

③	Shell	——	1	Copper Alloy	Sn Plated	——
②	Terminal	——	4	Copper Alloy	Au/Sn Plated	——
①	Housing	——	1	LCP	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12				
CHECKED				TITLE:	USB CONNECTOR	
APPROVALS				PART NO.	U-A-24DD-W-19	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.25				
	5~10	±0.20				
	~ 5	±0.15				
			±2'	DRAWING NO.	——	SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.