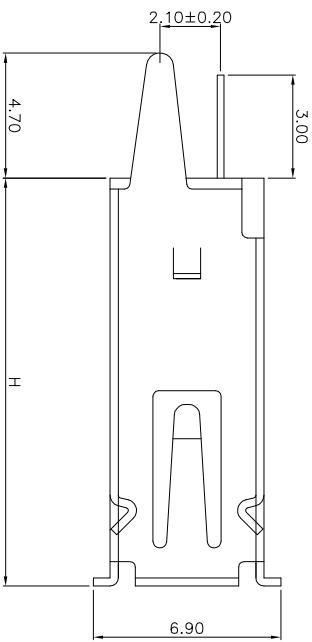


特性: Specifications;
电器: Electrical:
接触阻抗: Contact Resistance
30 millionms MAX



耐电压: Dielectric Withstanding Voltage:
500v AC AT Sea Level

绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MLN

机构: Mechanical:
接合为: Mating Force;

4.0 KG MAX 最大4Kg
拔出力: Unmating Force;



0.7KG MIN.最少0.7KG

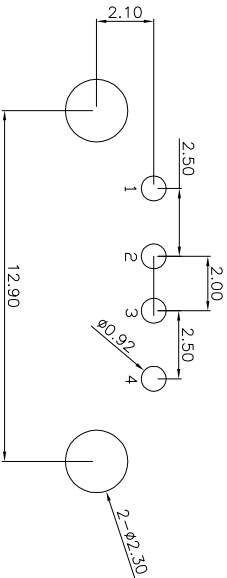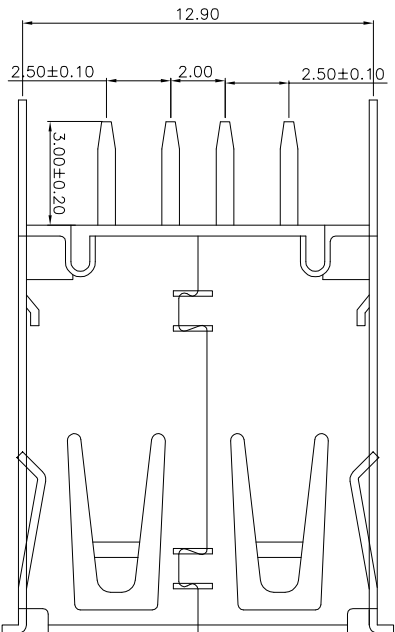

PART NO	H
U-A-24DD-Y-7	13.00
U-A-24DD-Y-8	13.70
U-A-24DD-Y-9	15.00

Recommended PCB Layout

③	Base	—	1	NYLON	White
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12			
CHECKED			TITLE:	USB CONNECTOR	
APPROVALS			PART NO.		
TOLERANCES ARE		30~以上 10~30 5~10 ~ 5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE	UNIT: mm
				±2°	DRAWING NO.
					SCALE: 1:1
					PROJ:
					SHEET 1 OF 1
ECN NO.	REV.	DATE.	NEW		
			CHANGE.	CHECK.	APPRO.

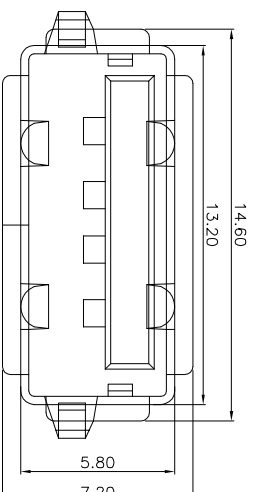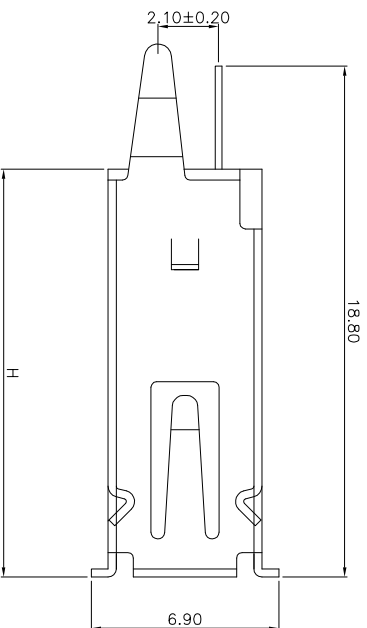

特性: Specifications;
电器: Electrical:

接触阻抗: Contact Resistance

30 millionms MAX
耐电压: Dielectric Withstanding Voltage

500v AC AT³ Sea Level

绝缘阻抗: Insulation Resistance:

1000 MEGA ohms MLN



机构: Mechanical:

接合为:Mating Force;

4.0 KG MAX 最大4kg

拔出力:Umating Force;

0.7KG MIN.最少0.7KG

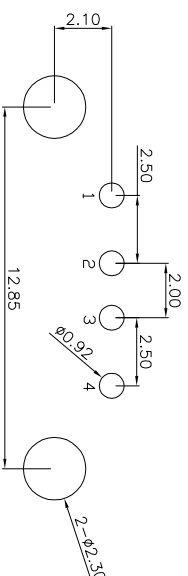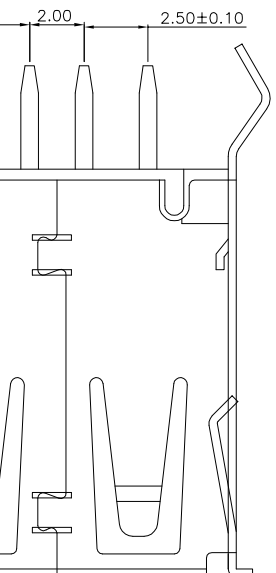

PART NO	H
U-A-24DD-Y-2	13.00
U-A-24DD-Y-3	13.70
U-A-24DD-Y-4	15.00

Recommended PCB Layout

③	Bose	—	1	NYLON	White
②	Terminal	—	4		Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	TER/NO.	QTY.	MATERIAL	FINISHING

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD
DRAWN	S.L.L	2019.10.12	

[illegible]