


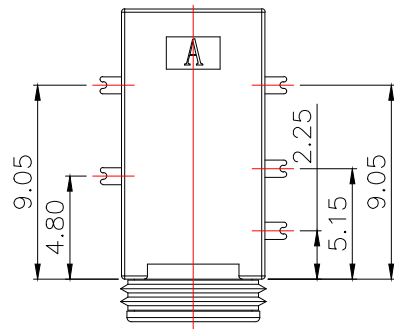
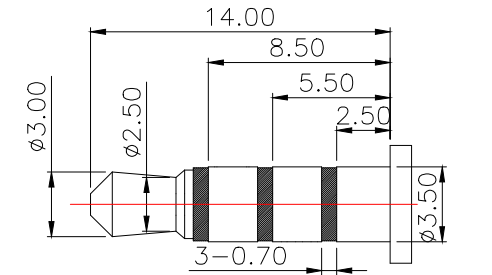



ROHS

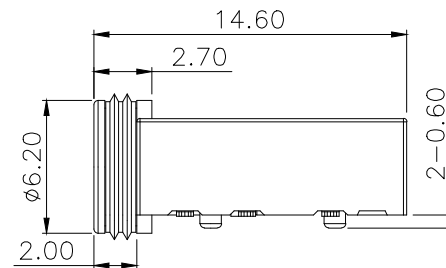



3D VIEW

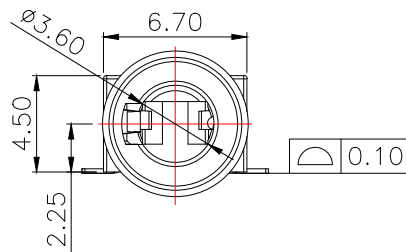

(ø3.50mm 4 POLE PLUG)

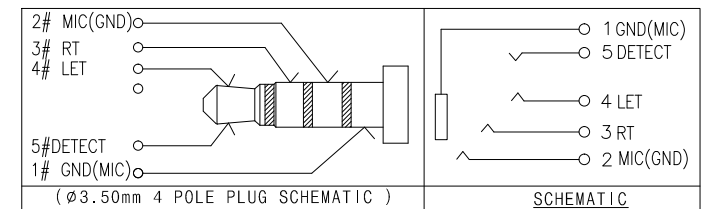

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;

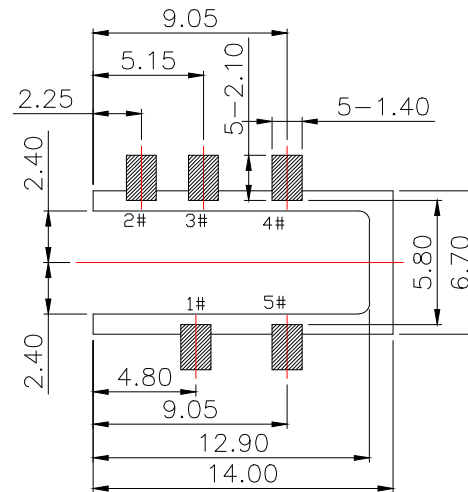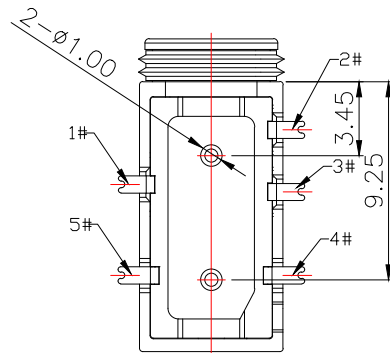

P.C.B LAYOUT(TOP view)

③	Waterproof ring	_____	1	Silica gel	_____	_____
②	Terminal	_____	5	Phosphor bronze/SUS	Ni Plating	_____
①	Housing	_____	1	HTP	Black	_____
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12				
CHECKED				TITLE:	PHONE JACKES	
APPROVALS				PART NO.	PJ-621B	
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.20				
	5~10	±0.15				
	~ 5	±0.10				
			±2°	DRAWING NO.	_____	SHEET 1 OF 1

ECN NO.	A	DATE.	NEW	CHANGE.	CHECK.	APPRO.
			DESCRIPTION.			