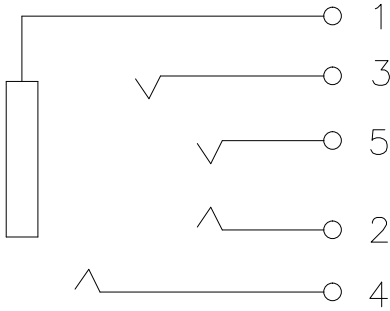
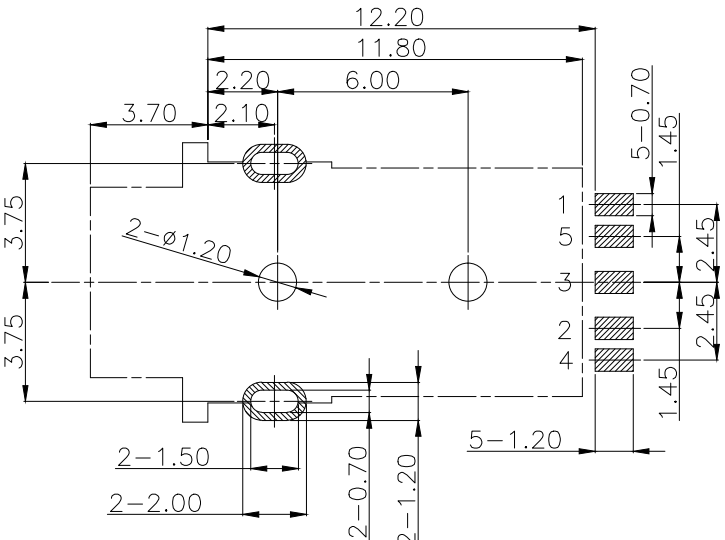
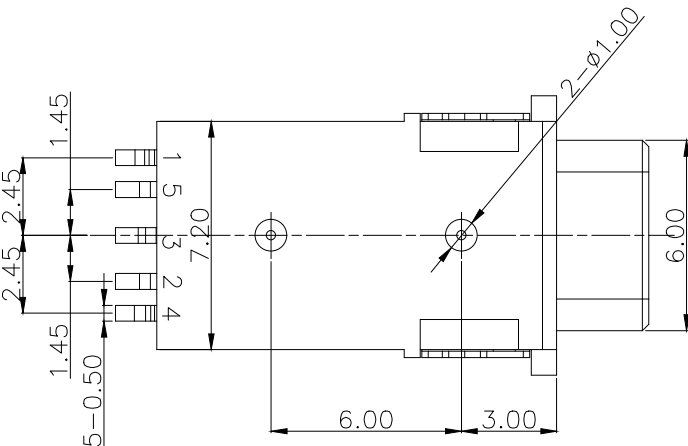
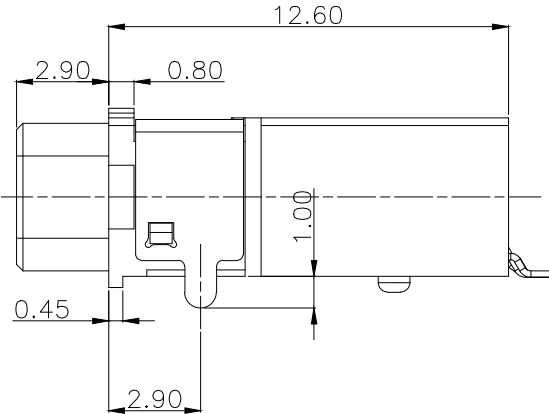
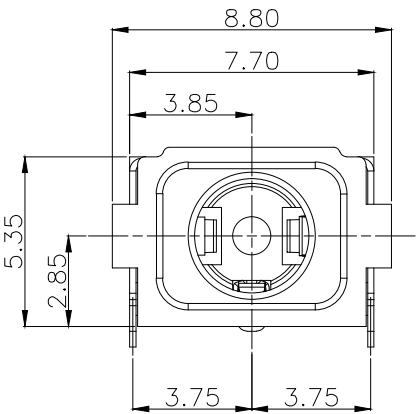
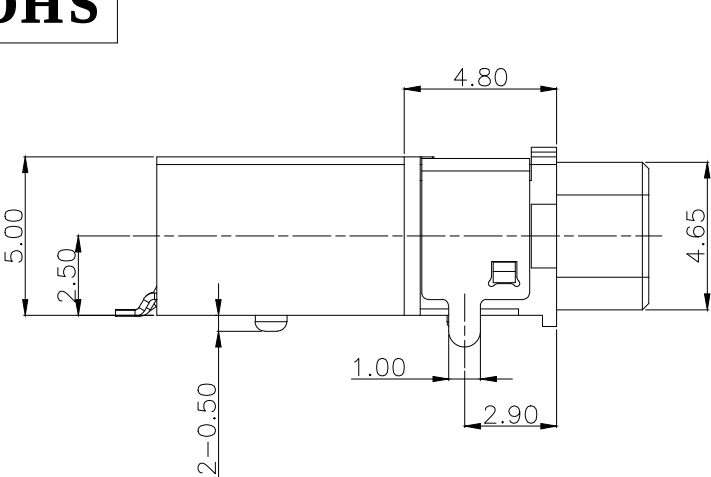


Φ3.5 MATE PLUG

Rating:0.5A 12V DC
Contact Resistance:50 mΩ Max.
Operating temperature:-20℃~70℃
Operating force:3-20N
Operating Life:5,000cycles
Teproof level: IPX7

P.C.B Layout

CIRCUIT DIAGRAM

②	Terminal	_____	5	Phosphor bronze	Au Plating	_____	
①	Housing	_____	1	Nylon	Black	_____	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK	
APPROVALS			DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.10.12					
CHECKED				TITLE:	PHONE JACKES		
APPROVALS				PART NO.	PJ-611-5A		
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2'		DRAWING NO.	_____	SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			