

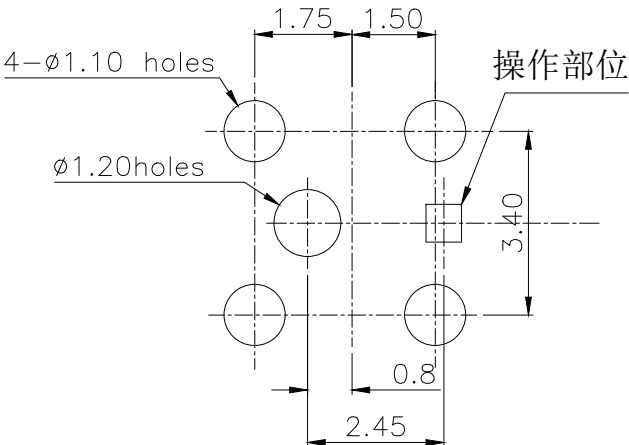


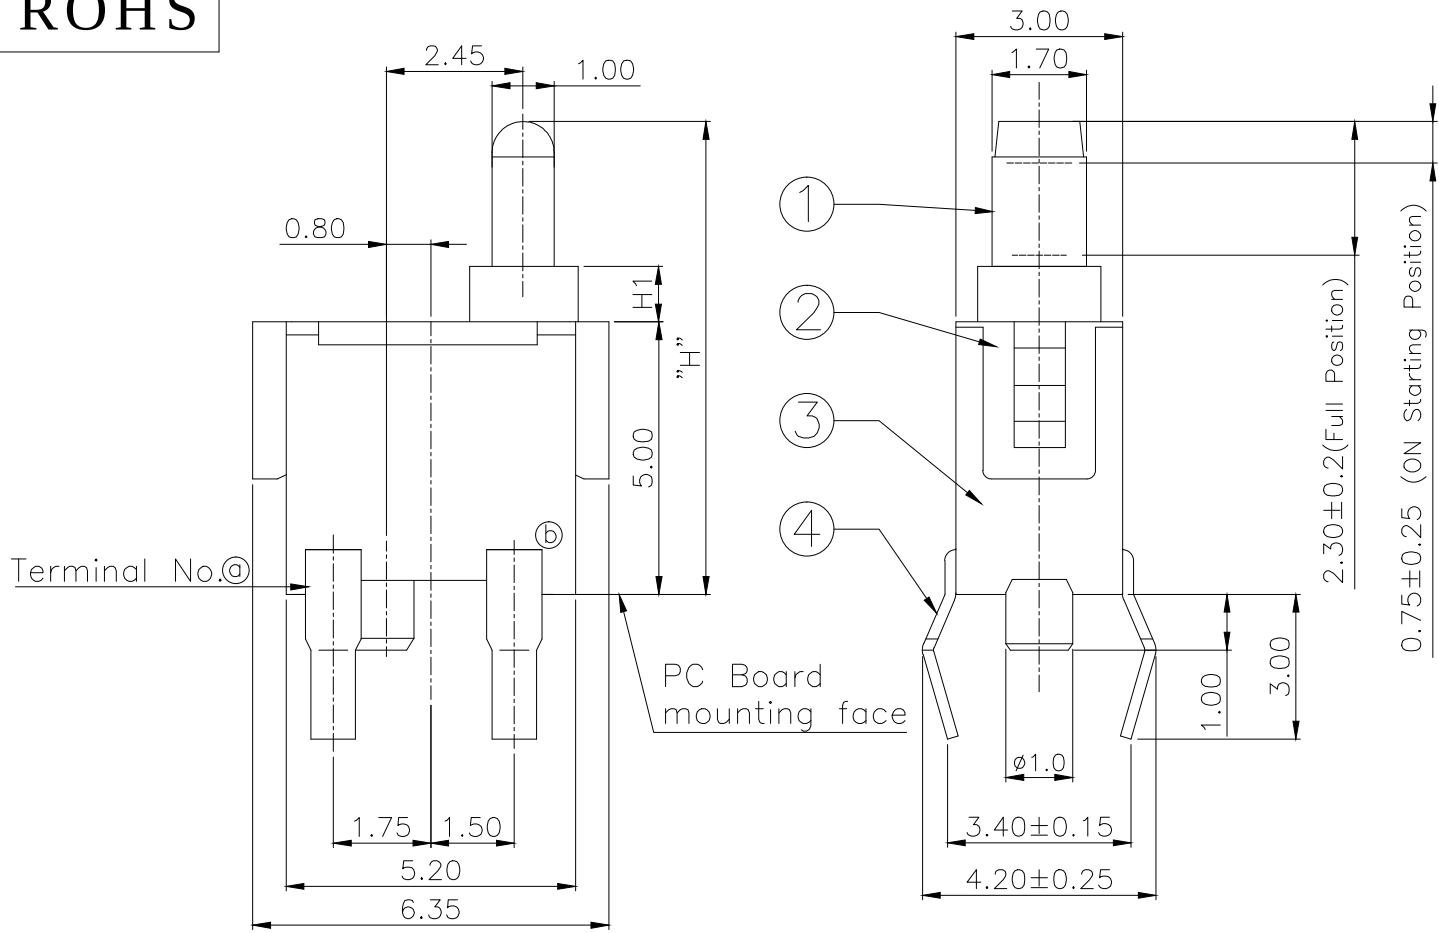

PCB Layout(Pattern side)

PART NO.	H	H1
K5-1130DA-01	8.5	1
K5-1130DA-02	11.0	2
K5-1130DA-03	12.3	2
K5-1130DA-04	13.7	2





Circuit Diagram

NOTE:
Rating: DC 30V 0.1A
Operating Force: 40±10gf
Lifetime: 100,000 Cycles


⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	NYLON	Black	—
①	Knob	—	1	NYLON	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD	
DRAWN		S.L.L	2019.9.30			
CHECKED					TITLE:	DETECTOR SWITCHES
APPROVALS					PART NO.	K5-1130DA-□□
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10	±2°	DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

ROHS

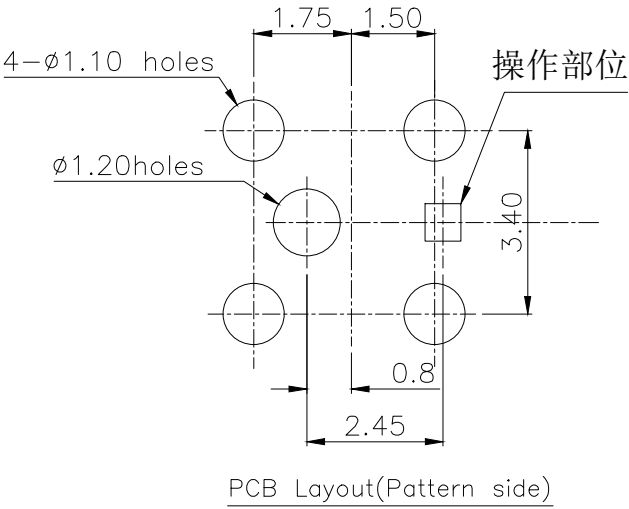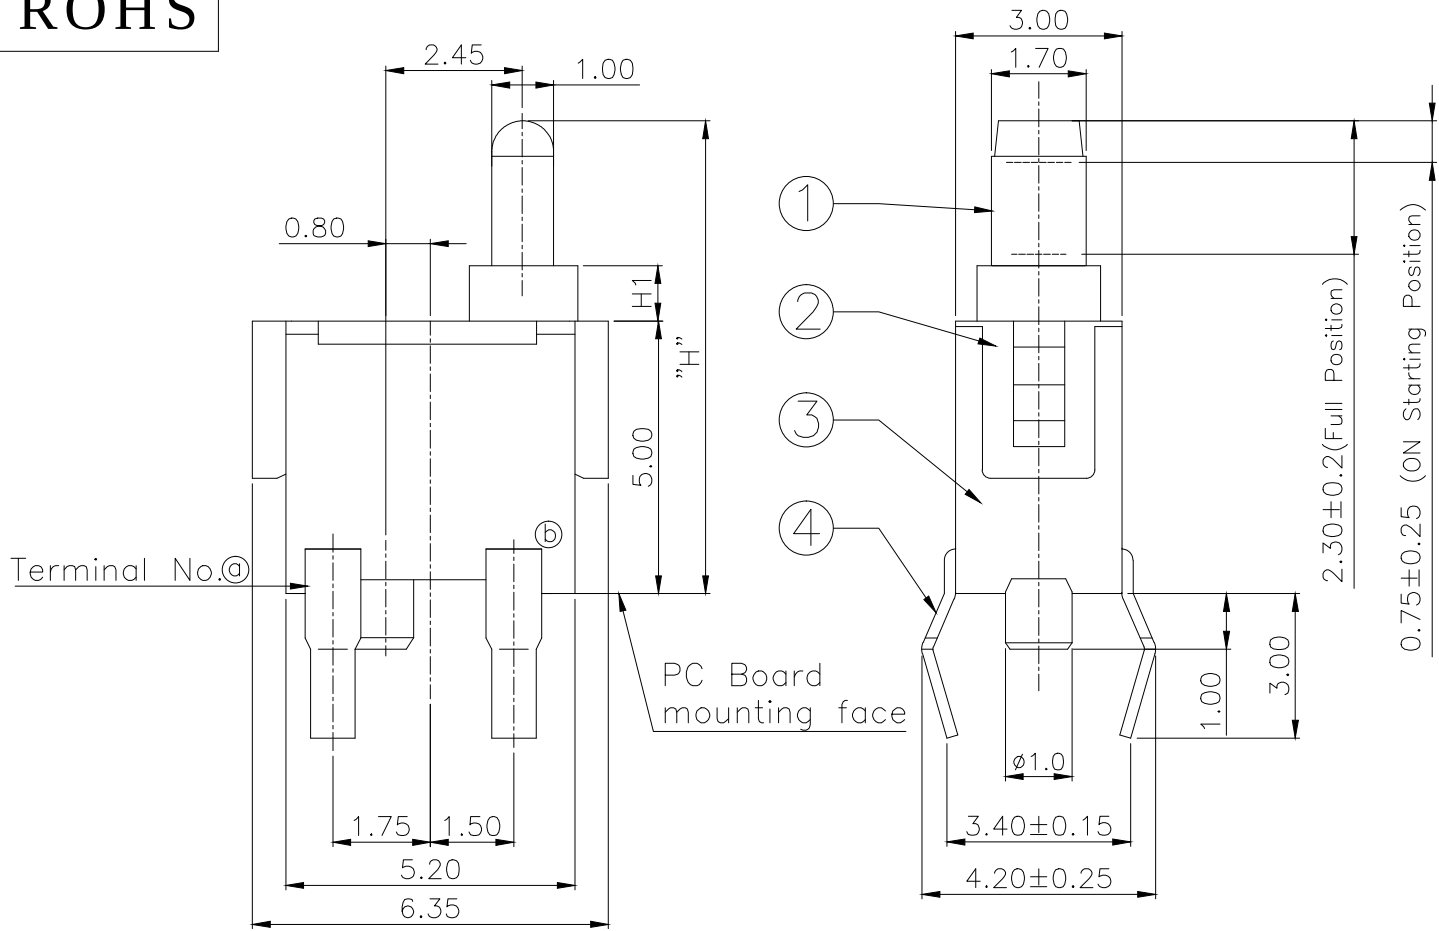

PART NO.	H	H1
K5-1130DA-05	8.5	1
K5-1130DA-06	11.0	2



NOTE:
Rating: DC 30V 0.1A
Operating Force: 40±10gf
Lifetime: 100,000 Cycles

⑤	Contact Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Terminal	—	4	Phosphor Bronze	Ag Plated	—
③	Base	—	1	NYLON	Black	—
②	Cover	—	1	NYLON	Black	—
①	Knob	—	1	NYLON	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD	
DRAWN		S.L.L	2019.9.30			
CHECKED					TITLE:	DETECTOR SWITCHES
APPROVALS					PART NO.	K5-1130DA-□□
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10	±2°	DRAWING NO.	SHEET 1 OF 1

_____	A	_____	NEW	_____	_____	_____
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.