


RoHS

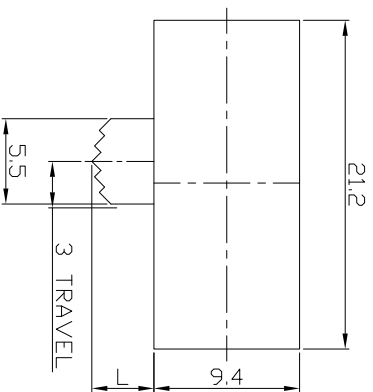


MODEL CODE

SK-42F01-GDB

Knob Type
GDB

L(mm)
~

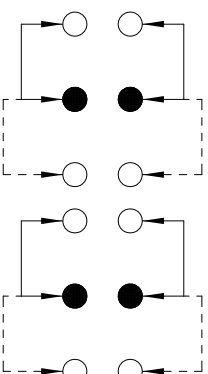




CIRCUIT DIAGRAM

Height (高度) :

NO. 1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷) :	DC 50V 30mA						
Contact impedance (接触阻抗) :	≤100m Ω MAX						
Insulation impedance (绝缘阻抗) :	≥100M Ω MIN						
TIMING	NON-SHORTING						
OPERATING LIFE (电气寿命) :	100,000 cycles						
Usage temperature (使用温度) :	-25 ℃ to 85 ℃						
CIRCUIT	4P2T						
Trip(行程) :	3.0±0.2mm						
Operating force(操作力) :	<table><tr><td>1</td><td>2</td></tr><tr><td>3</td><td>4</td></tr><tr><td>5</td><td>6</td></tr></table> 300±100gf	1	2	3	4	5	6
1	2						
3	4						
5	6						

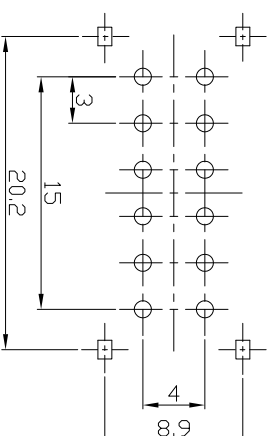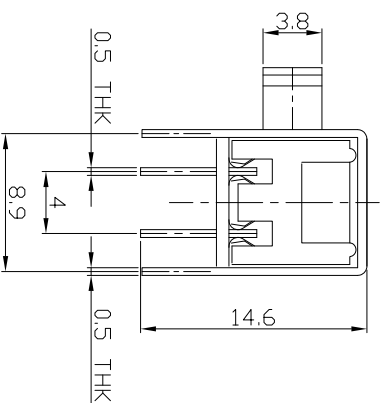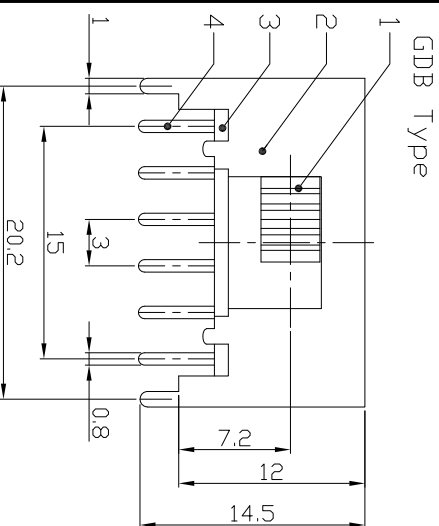

P.C.B LAYOUT
BOTTOM VIEW

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

F

E

D

SK-42F01-□

B

A

F

E

D

C

B

A