



RoHS
Compliant
2002/95/EC





MODEL CODE

SS-12D37-GEE

Knob Type
GEE
VAC

L(mm)
~

DIMENSIONS

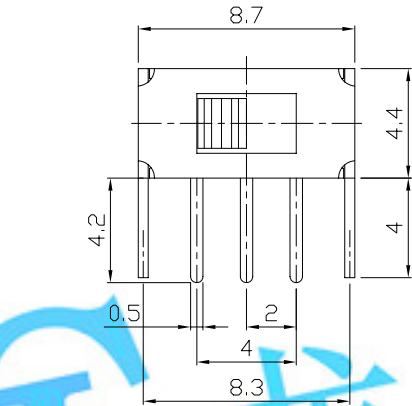

P.C.B LAYOUT



BOTTOM VIEW

CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

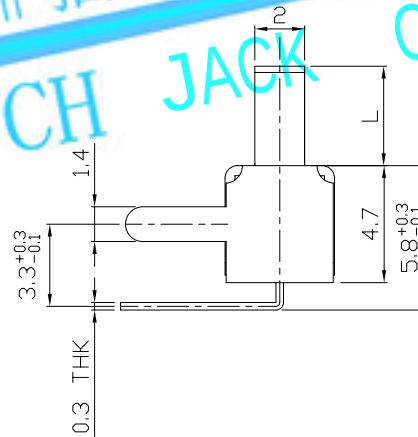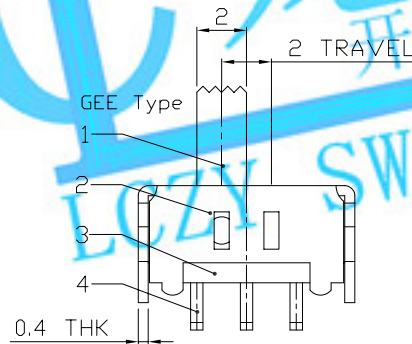

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LONGCHUANG ZHONGYE (HK)CO.,LIMITED					
7					OVER 1.5mm: ±0.2mm	MAT'L						
6	SPRING PLATE	PBS STRIP	1	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-12D37			
5	CONTACT CLIP	PBS STRIP	1	Ag CLAD			DR: <i>Ricky</i> 2015/07/07		DWG NO.: ADL-12D37			
4	TERMINAL	BRASS STRIP	3	Ag CLAD			CHKD: <i>Ricky</i> 2015/07/07					
3	BASE	PHENOLIC RESIN	1	NATURAL			APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
2	FRAME	STEEL STRIP	1	Ni PLATED					4:1	1/1	A	
1	KNOB	POM	1	BLACK								
NO.	PARTS	MATERIAL	Q'TY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.