

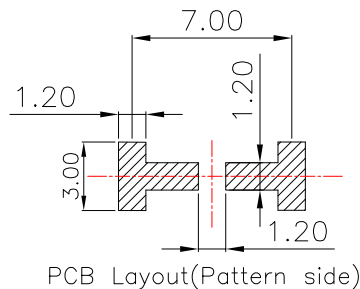


RoHS

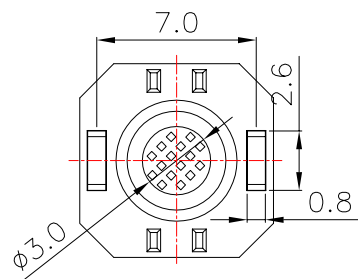

Height(高度) :

NO.1	
PART NO	H
D	3.0
F	

Material:

Button 按钮	硅胶 (红色)
Cover plate 盖板	硅胶 (红色)
Pin 引脚	磷铜 (镀银)

Main technical specifications:

Rated load(额定负荷):	DC 12V 50mA
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
Welding resistance temperature(耐焊温度):	250 ± 5 ° 5s
OPERATING LIFE (电气寿命):	2000,000 cycles
Usage temperature (使用温度):	-65 to 200
Operating humidity (使用湿度):	≤ 85% RH
Trip(行程):	1.0 ± 0.2mm
Operating force(操作力):	1 120 ± 25gf
NO.2	2

public errand (公差) : ± 0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING		G.L CHEN	DWG.No.	LCZY	
PART NO.		K2-8808SP		CHECK		Z.LIU	REV.	A1	
	UNIT : mm	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE 0°±3°	APPROVAL	DATE	K2-09-2019	
			ABOVE 5 ~ 30	±0.3					
			ABOVE 30	±0.5		SCALE	PAGE	1 OF 1	
			ANGLE	±3°					

K2-8808SP - □ - □